


NIKKO+21/G

Part number 002011

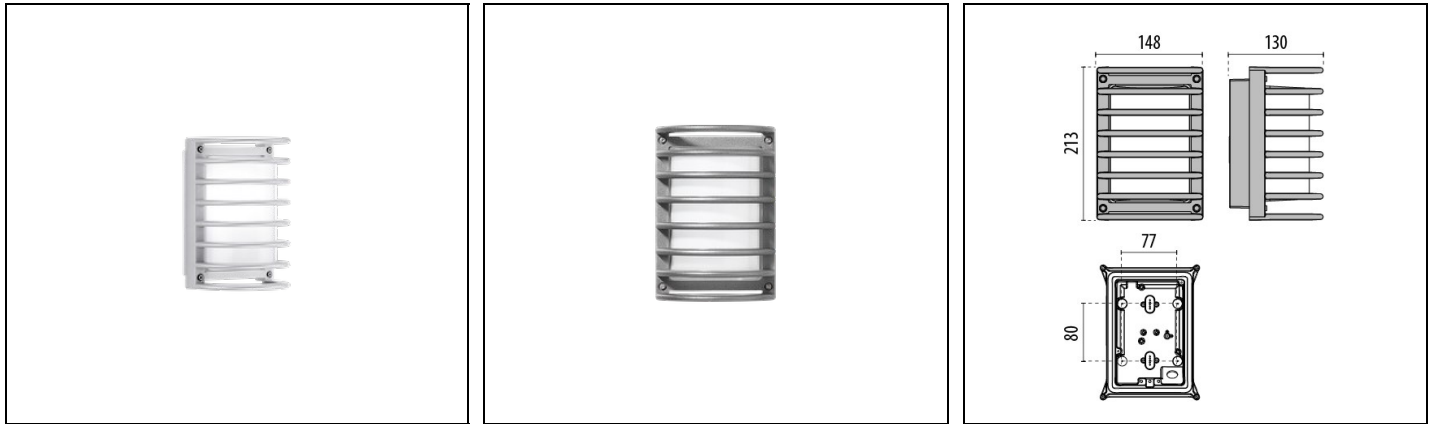

Description

Wall, ceiling and post mounted luminaire for indoor and outdoor, comprising:

- Aluminium housing and guard (/G), polyester powder coat finish ISO 9227/12944 - ISO 9223 (C5)
- Pressed glass diffuser, internally coated, secured with the ring
- Aluminium reflector and gear tray
- Technopolymer silicone sealing gasket
- Stainless steel locking hardware
- Design by ROBERTO FIORATO
- Design by ROBERTO FIORATO

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>

Product data

| | | | |
|-------------|----------|-------------|----------|
| ETIM Group: | EG000027 | ETIM Class: | EC002892 |
|-------------|----------|-------------|----------|

General information

| | | | |
|--------------------------|--------|------------------------------------|----------------------------------|
| Lampholder: | E27 | Light source: | Incandescent lamps |
| Luminaire wattage [W]: | 1x60 W | Colour / Finishing: | GR-94 / Metallic grey / Textured |
| IP degree of protection: | IP65 | Impact resistance / impact energy: | IK05 0.7J xx3 |
| Protection class: | I | Optic: | S/EW - Symmetric Extra-Wide |
| Net weight [kg]: | 1.681 | Overall length [mm]: | 148 |
| Overall width [mm]: | 130 | Overall height [mm]: | 213 |

Mechanical features

| | | | |
|--------------------|-------------|-------------------|-----------|
| Shape: | Rectangular | Housing material: | Aluminium |
| Diffuser material: | Glass | | |


Installation

| | | | |
|--------------------------------|------------------|--------------------------------|----------|
| Application area: | Outdoor lighting | Mounting type: | Bulkhead |
| Min. ambient temperature [°C]: | -30 | Max. ambient temperature [°C]: | 50 |

Light features


To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>

Photometric data

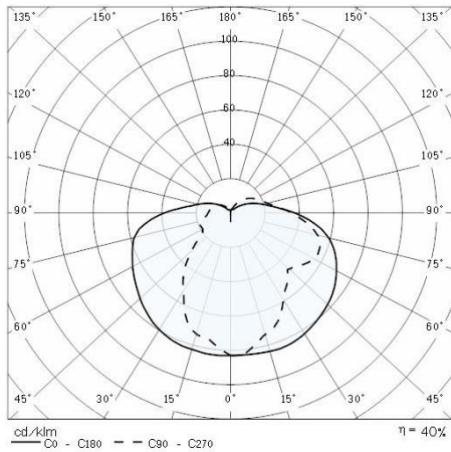


Optional accessories


NIKKO+21

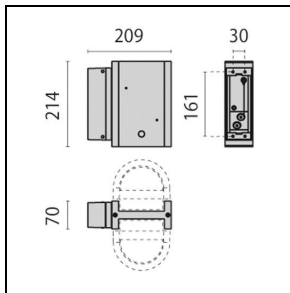

000401
 Wall bracket 21
 ■ GR-94 / Metallic grey



000405
 Post 21 235 mm
 ■ GR-94 / Metallic grey



000409
 Post 21 583 mm
 ■ GR-94 / Metallic grey

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/gr/company/led-warranty>