


MULTI+ 30 PC HF

Part number 30416990100

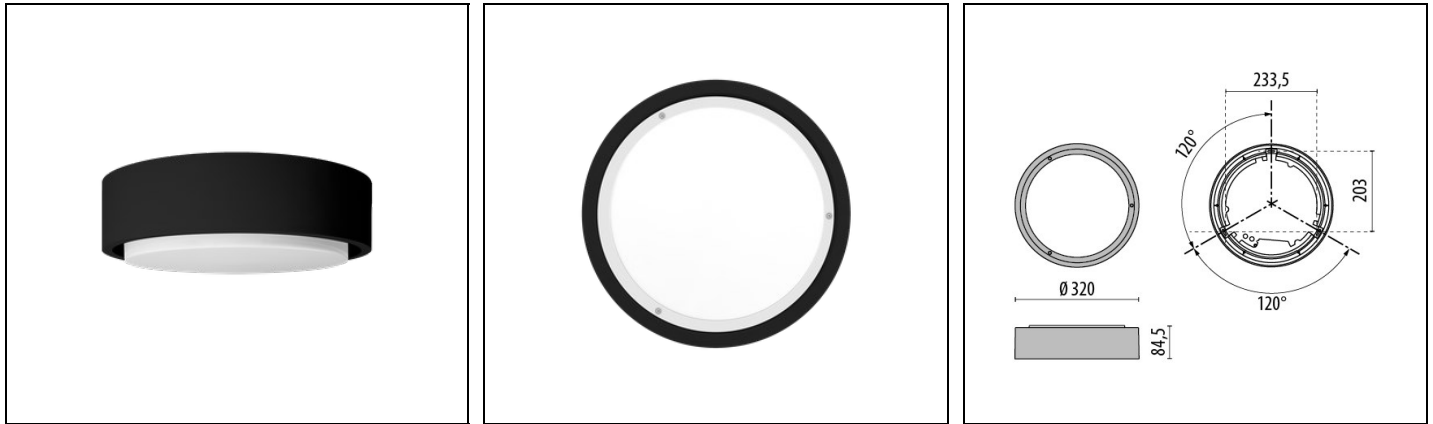

Description

Series of wall and ceiling mounted luminaires for indoor and outdoor use, comprising:

- Technopolymer housing
- Technopolymer vandal-proof opal diffuser, 960°C glow wire test rated
- Anti-ageing custom moulded silicone sealing gasket(s)
- Stainless steel, anti-tampering locking screws
- Through-wiring designed
- Integral, tilttable, self-heat dissipating, Metal-Core SMD LED board (future proof)
- Class II
- Built-in driver
- Max 20 mm diameter for cable/conduit entry
- EM/3P version is designed for multipurpose 3 hours sustained emergency lighting
- Hyper-frequency (HF) sensor operating at 5.8 Ghz+/- 75 Mhz
- SMART versions are equipped with customised electronic devices that allow energy savings reducing the luminous flux, whilst providing a 30% working flux for safety lighting and reaching 100% flux when necessary
- SMART HF versions are complete with integrated High Frequency (HF) sensor that operates from 30% up to 100% of the flux when it detects the presence of people
- SMART DA versions are suitable for use in systems with two separate lines where the demand for 100% of the flux is managed by a push button or line sensor

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>

Product data

ETIM Group:	EG000027	ETIM Class:	EC002892
-------------	----------	-------------	----------

General information

Lampholder:	LED	Light source:	LED
Lightsource lumen output [lm]:	2447	Luminaire lumen output [lm]:	1292
Luminaire wattage [W]:	16 W	Luminous efficacy [lm/W]:	81
CRI:	80	Colour temperature [K]:	4000
Colour / Finishing:	BK-81 / Black / Textured	IP degree of protection:	IP65
Impact resistance / impact energy:	IK10 20J xxg	Protection class:	II
Optic:	S/EW - Symmetric Extra-Wide	Net weight [kg]:	1.228
Overall diameter [mm]:	320	Overall width [mm]:	85

Mechanical features

Shape:	Round \geq 300 mm	Housing material:	Plastic
Diffuser material:	Plastic	Glow wire test [°C]:	750 °C
Anti-vandal screws:			

Electrical features

Voltage type:	AC	Input voltage [V AC]:	220/240
Input frequency [Hz]:	50/60	Power factor / COS Φ :	>0.9
Inrush current [A/ μ s]:	5 / 50	C10 1.5 mm ² :	52
C16 2.5 mm ² :	85	B10 1.5 mm ² :	31
B16 2.5 mm ² :	50		

Installation

Application area:	Outdoor lighting	Mounting type:	Bulkhead
Min. ambient temperature [°C]:	-20	Max. ambient temperature [°C]:	30

Light features

MacAdam:	3	Lumen maintenance:	L80B10@6000h
Distribution of light emission:	Direct		

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>

Optional accessories

MULTI+ 30 PC



310514

Tool TORX

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>

For information:
PERFORMANCE IN LIGHTING S.p.A. Headquarters - Italy
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

info.it@pil.lighting
www.performanceinlighting.com