


# LIQUID PL M2 WHITE

Part number 8712211553301

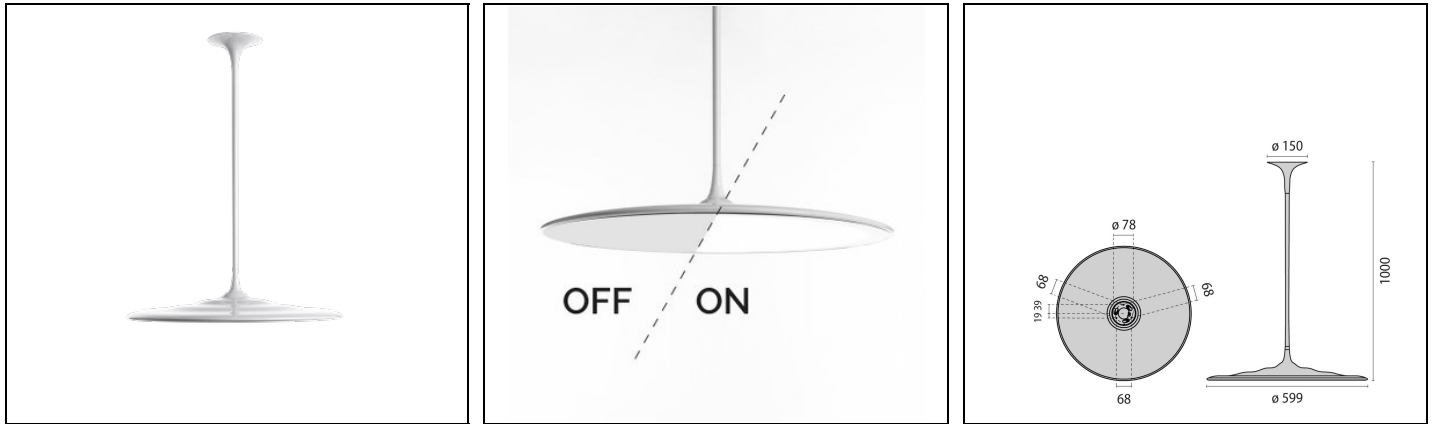

## Description

Suspended, round LED luminaire for indoor, comprising:

- Die-cast aluminium luminaire head and canopy, with exclusive water lacquering
- Steel suspension tube, with exclusive water lacquering
- Optical diffuser with integrated high transmittance light guide in shiny opal white glass (WHITE)
- Direct light distribution
- LED Sidelight-Technology for a homogenous light distribution over the entire area of the cover
- Colour tolerance according to MacAdam  $\leq 3$  SDCM
- Special colour versions available. Consult factory
- Design by WALTER DE SILVA
- Design by WALTER DE SILVA

## Product data

ETIM Group:	EG000027	ETIM Class:	EC001743
-------------	----------	-------------	----------

## General information

Lampholder:	LED	Light source:	LED
Lightsource lumen output [lm]:	6200	Luminaire lumen output [lm]:	4130
Luminaire wattage [W]:	55 W	Luminous efficacy [lm/W]:	75
CRI:	80	Colour temperature [K]:	3000
Colour / Finishing:	WH-RAL9016 / White RAL9016 / Glossy	IP degree of protection:	IP20
Impact resistance / impact energy:	IK02 0.2J xx0	Protection class:	I
Optic:	C/EW - Circular Extra-Wide	Beam angle:	2 × 57°/58°
Net weight [kg]:	7.3	Overall diameter [mm]:	599
Overall height [mm]:	1000		

## Mechanical features

Shape:	Round ≥ 300 mm	Housing material:	Aluminium
Diffuser material:	Glass	Glow wire test [°C]:	650 °C

## Electrical features

Voltage type:	AC	Input voltage [V AC]:	220/240
Input frequency [Hz]:	220-240V 50/60Hz	Power factor / COS Φ:	0.9
Inrush current [A/μs]:	12 / 50	C10 1.5 mm <sup>2</sup> :	25
C16 2.5 mm <sup>2</sup> :	45	B10 1.5 mm <sup>2</sup> :	25
B16 2.5 mm <sup>2</sup> :	45	EEL:	A2

## Installation

Application area:	Indoor lighting	Mounting type:	Suspended
Min. ambient temperature [°C]:	10	Max. ambient temperature [°C]:	40


## Light features

MacAdam:	3	Lumen maintenance:	L80B10@50000h
Distribution of light emission:	Direct	DFF - Downward Flux Fraction [%]:	100
UFF - Upward Flux Fraction [%]:	0		

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website [www.performanceinlighting.com](http://www.performanceinlighting.com). Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>

## Photometric data

---

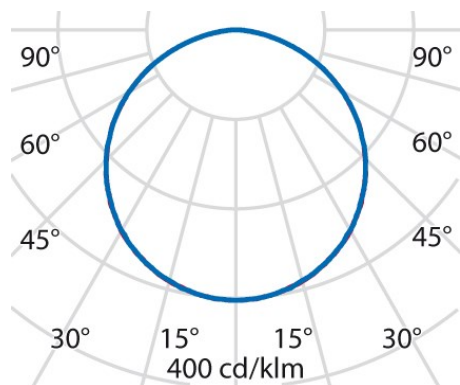

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website [www.performanceinlighting.com](http://www.performanceinlighting.com). Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>

For information:  
**PERFORMANCE IN LIGHTING S.p.A. Headquarters - Italy**  
Viale del Lavoro 9/11  
37030 Colognola ai Colli Verona - Italy  
Tel. +39 045 61 59 211

[info.it@pil.lighting](mailto:info.it@pil.lighting)  
[www.performanceinlighting.com](http://www.performanceinlighting.com)