

SL720SL L TWIN LED MICROPRISMATIC COVER

Part number 8720762708410



Description

LED dual-head free-standing luminaire for indoor, comprising:

- Luminaire heads and pole made of extruded aluminium profile, sheet steel base, powder-coated
- Angle of the lamp head adjustable using a set screw
- Practical U-shaped base enables luminaire to be positioned flexibly and flush to a writing desk
- Micro-prismatic diffuser for efficient light distribution, glare reduction and high uniformity (MP)
- Direct / indirect light distribution
- Switchable/dimmable direct and indirect light section
- Suitable for simultaneous lighting of 2 workstations
- Colour tolerance according to MacAdam ≤ 3 SDCM
- Complete with flexible power cord with plug
- VDU application suitable acc. to EN 12464-1
- Sensor device available with task oriented PIR detector and daylight control
- Individual lighting control system for individual luminaires available. Consult factory
- 3000K (CCT) versions available. Consult factory
- Special colour versions available. Consult factory
- For the innovative lighting technology of these lights patent is applied for (No. 10201511701.2)

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>

Product data

ETIM Group:	EG000027	ETIM Class:	EC000300
-------------	----------	-------------	----------

General information

Lampholder:	LED	Light source:	LED
Lightsource lumen output [lm]:	17200	Luminaire lumen output [lm]:	15110
Luminaire wattage [W]:	106 W	Luminous efficacy [lm/W]:	143
CRI:	80	Colour temperature [K]:	4000
Colour / Finishing:	WH-RAL9016 / White RAL9016 / Textured	IP degree of protection:	IP20
Impact resistance / impact energy:	IK05 0.7J xx3	Protection class:	I
Optic:	S/C - Symmetric direct-indirect	Beam angle:	2 x 43°
Net weight [kg]:	24.6	Overall length [mm]:	869
Overall width [mm]:	735	Overall height [mm]:	2064

Mechanical features

Shape:	Rectangular	Housing material:	Aluminium
Diffuser material:	Plastic	Glow wire test [°C]:	650 °C

Electrical features

Voltage type:	AC	Input voltage [V AC]:	220/240
Input frequency [Hz]:	220-240V 50/60Hz	Power factor / COS Φ:	0.9
Input voltage [V DC]:	176/280	Inrush current [A/μs]:	33 / 280
C10 1.5 mm ² :	10	C16 2.5 mm ² :	16
B10 1.5 mm ² :	6	B16 2.5 mm ² :	10
EEL:	A1		

Installation


Application area:	Indoor lighting	Mounting type:	Free standing
Min. ambient temperature [°C]:	10	Max. ambient temperature [°C]:	40

Light features

MacAdam:	3	Lumen maintenance:	L80B10@50000h
Distribution of light emission:	Direct/Indirect	DFF - Downward Flux Fraction [%]:	23
UFF - Upward Flux Fraction [%]:	77	UGR max.:	13.0


To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>

Photometric data

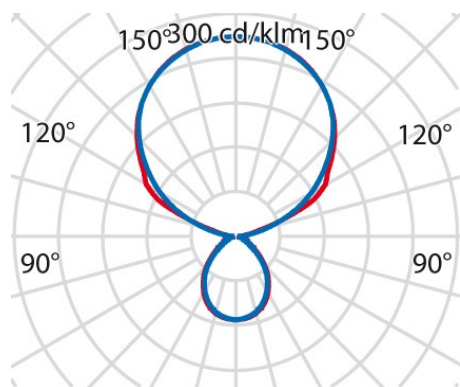


Optional accessories

SL720SL LED



8118000257
Remote control "Master" for versions with a sensor function



8118000647
Remote control "User" for versions with a sensor function

SL720 SL TWIN LED



8740195967
Remote control "Master"

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>