

ALU WALL



Wall effect series. Fixtures consist of:

- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision machined anodized aluminum housing and optical compartment.
- Satin UV-stabilized diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Custom MCPCB utilized to maximize heat dissipation and promote a long LED life.
- Wall effects light emission.
- Single (M) or dual (B) light emission.

- To be used with a low-voltage, constant-current (700 mA) driver (ordered separately, consult factory for more information).
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options.
- Matching junction box plate optional accessory available (ordered separately).
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty.
- Marine Grade finish.




FINISHES

- BK-40 / Anodized black / Matt
- GR-EV1 / Anodized aluminum / Matt

WITH MOQ 30

- AN-96 / Iron gray / Textured
- BK-81 / Black / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- RB-10 / Iron rust / Textured

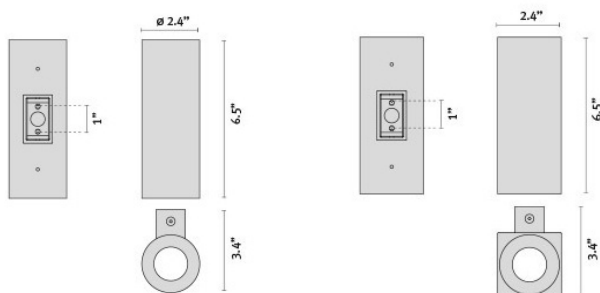

ALU
WALL/R

ALU
WALL/S

Lumen Output	27K	3K	35K	4K	6K
Alu Wall R/ B	106	112	117	123	135
Alu Wall R/M	53	56	59	62	68
Alu Wall S/B	106	112	117	123	135
Alu Wall S/M	53	56	59	62	68

2.1W Max Wattage - M

4.2W Max Wattage - B



Scan here
for installation
instructions

Revision 11
03/25

Order Guide - Alu Wall



Order code example

AW-B-R-AA-3K-120-NA-RDR

AW-

Light Emission	Housing Style	Finish	Kelvin	Voltage	Controls	Accessories
M (One-Way) B (Two-Way)	R Round Housing S Square Housing	AA Anodized Aluminum	27K 2700k	UNV 120-277V Remote Driver Voltage	NA Non Dimming 0-10V 0-10V Remote Dimming Driver ELV 120V Remote Line-Voltage Dimming Driver For more Options Contact Factory	JBOX Jbox cover RDR Remote driver, please specify quantity of fixtures per driver REM Remote battery pack, requires multiple fixtures wired in series BABAA Build America Buy America Act compliant
		AB Anodized Black	3K 3000k			
		35K 3500k	4K 4000k			
		Finishes Below Available MOQ30 pieces	6K 6000k			
		IG Iron Gray	RED Static Red			
		IR Iron Rust	GRN Static Green			
		WH Textured White	BLU Static Blue			
		CC Custom Color	AMB 590nm Amber (turtle-friendly)			

80 CRI STANDARD - OTHER OPTIONS AVAILABLE