



# PRONTO 2023




*Ship it*

**GEWISS**

PERFORMANCE  
**iN** LIGHTING

powered by  
**GEWISS**





## PRONTO | Core program

The "PRONTO" program consists of those article codes which you may more easily find in stock (shipment between working 3-10 days).

These codes are generally available with shorter delivery times. Please select these codes when a "quick ship" lead time is necessary for your project.

## PRONTO | Kernprogramm

Das "Pronto"-Programm umfasst die Artikelcodes, die wir generell auf Lager führen (Versand zwischen 3-10 Tagen). Im Allgemeinen haben diese Artikel eine höhere Verfügbarkeit und dadurch kurze Lieferzeiten. Wenn das Timing also von entscheidender Bedeutung ist, empfehlen wir ihnen, die im Katalog aufgeführten Produkte zu bevorzugen.

## PRONTO | Les Essentiels

Le programme coeur de gamme "PRONTO" est composé de codes articles essentiels généralement en stock (expédition entre 3 à 10 jours ouvrables).

Ces articles ont une disponibilité plus élevée des conditions d'approvisionnement améliorées. Sélectionnez ces codes lorsqu'un délai plus court est nécessaire pour votre projet.

## PRONTO | Kernpakket

Het programma "PRONTO" bevat de artikelcodes die we normaal gesproken op voorraad hebben (verzending tussen werken 3-10 dagen).

Over het algemeen hebben deze codes een hogere beschikbaarheid en betere leveringsvoorwaarden. Als timing essentieel is, adviseren wij deze codes te selecteren.

## PRONTO | Core program

În cadrul catalogului PRONTO, poți găsi produse disponibile în stoc, cu un timp de livrare între 3-10 zile lucrătoare. Aceste coduri de produs au, în general, un termen de livrare scurt. Dacă ai nevoie de o expediție imediată în cadrul proiectelor cu termene strânse, poți opta pentru aceste coduri cu livrare rapidă.



## Get more information with this QR code!

By scanning this QR code you can access more of our product's technical data and associated regulations as well as the most recent technical data and versions of products and/or LEDs not found in the print catalogue. With a simple click on your mobile phone you will be immediately directed to the most up-to-date technical information for the product or series you are searching for.

## Accédez à plus d'informations grâce à ce QR code!

En scannant ce QR code, vous pourrez accéder à davantage de données techniques relatives aux produits et aux réglementations associées, ainsi qu'aux données techniques les plus récentes et aux versions de produits et/ou solutions LED qui ne sont pas présentées sur ce catalogue papier.

Par un simple clic sur votre mobile, vous serez immédiatement dirigés sur la dernière mise à jour de la fiche technique du produit ou de la série que vous recherchez.

## Scan de QR-code voor meer informatie!

Door deze QR-code te scannen, krijgt u toegang tot meer en meest recente (technische) gegevens van ons product en bijbehorende voorschriften, evenals gegevens van de versies die niet in de gedrukte catalogus staan.

Met een simpele scan met uw mobiele telefoon wordt u direct doorverwezen naar de meest actuele (technische) informatie van het product of de serie die u zoekt.

## Weitere Informationen erhalten Sie über diesen QR-Code!

Durch Scannen dieses QR-Codes erhalten Sie Zugang zu weiteren technischen Daten, Produkten und Normen, sowie zu den aktuellen technischen Produktdaten oder LED-Versionen, die nicht in diesem gedruckten Katalog enthalten sind.

Mit einem einfachen Klick auf Ihrem Mobiltelefon werden Sie sofort zum aktuellen Produktdatenblatt oder der gesuchten Serie weitergeleitet.

## Obține mai multe informații cu acest cod QR!

Prin scanarea acestui cod QR poți accesa mai multe detalii ale produselor noastre și reglementările asociate, precum și cele mai recente date tehnice și versiuni ale produselor și/sau LED-urilor care nu se găsesc în catalogul tipărit.

Cu un simplu clic pe telefonul mobil, vei fi direcționat imediat către cele mai recente informații tehnice pentru produsul sau gama de produse pe care o cauți.

# Technical indoor

## Downlights

Einbau-Downlights



12  
ELIA AL - S2



12  
ELIA AL - M2



13  
DLSB150 LED



13  
DLSB185 LED



13  
DLSB220 LED



14  
DL ROUND MIDI



14  
DL ROUND MAXI



14  
DL SQUARE MAXI



15  
MANGO+ MIDI



15  
MANGO+ MAXI

## Wall Ceiling surface

Wand- und  
Deckenanbauleuchten

Plafond  
opbouwarmaturen

Appliques plafond/mur

Pared/techo



16  
FL ROUND 333 AB



16  
FL ROUND 555 AB



17  
WL220 ROUND



17  
WL270 ROUND



17  
WL400 ROUND



17  
WL210 SQUARE



17  
WL260 SQUARE



17  
WL390 SQUARE

# Office

Suspended  
Pendelleuchten  
Pendelarmaturen  
Suspensions  
De suspensión



18  
SL713+ PL



18  
SL629 PL

Ceiling surface  
Anbauleuchten  
Plafond  
opbouwarmaturen  
Appliques plafond  
Luminarias de techo




19  
SL629AB


Ceiling recessed  
Einbauleuchten  
Plafond  
inbouwarmaturen  
Encastrés plafond  
Empotrables de techo




20  
PLATO 600  
microprismatic



20  
PLATO 625  
opal



21  
ELA 600  
microprismatic



21  
ELA 625  
microprismatic



22  
ELIA PL  
M2 60x60  
microprismatic



22  
ELIA PL  
M2 60x60  
opal



23  
ELIA PL  
M3 62x62  
microprismatic



24  
ELIA PL BACKLIT  
M2 60x60  
opal



24  
ELIA PL BACKLIT  
M3 62x62  
opal



25  
PLATO 1200  
microprismatic



25  
ELIA PL  
M1 30x120  
microprismatic



# Industrial

Hi-bay / low-bay

Hallenpendelleuchten

High-bay en low-bay  
armaturen

Suspensions industrielles

Luminarias para naves  
industriales



**26**  
LAMA+



**27**  
LAMA+ MINI



**28**  
SMART[4]  
1M HE - HLO



**29**  
SMART[4]  
2M HE - HLO



**30**  
A+  
60



**30**  
A+  
100



**30**  
A+  
150



**30**  
A+  
200



**31**  
ELIA HL  
M2 - M3 - L2

Surface weatherproofs

Leuchten mit erhöhter  
Schutzart

Waterdichte  
opbouwarmaturen

Luminaires industriels  
étanches

Luminarias estancas



**32**  
SMART[3]  
800 opal



**32**  
SMART[3]  
800 transparent



**32**  
SMART[3]  
1200 opal



**32**  
SMART[3]  
1200 transparent



**32**  
SMART[3]  
1600 opal



**32**  
SMART[3]  
1600 transparent



**33**  
SMART[3]e  
800 opal



**33**  
SMART[3]e  
800 transparent



**33**  
SMART[3]e  
1200 opal



**33**  
SMART[3]e  
1200 transparent



**34**  
SMART[3] PLUS  
1600 opal



**34**  
SMART[3] PLUS  
1600 transparent



**36**  
ACRO BASIC



**37**  
ACRO PRO



**38**  
NORMA+



**38**  
NORMA+ CL



# Residential

Wall / Ceiling surface

Glaskanbauleuchten

Glazen opbouwarmaturen

Plafonniers en verre  
pressé

Plafones de cristal  
prensado



39  
BLIZ RING



41  
NIKKO 21



39  
EKO 26



40  
EKO 21



40  
EKO 21 GRILL



40  
EKO 26



41  
DROP 28

Bulkheads

Anbauleuchten

Opbouwarmaturen

Plafonniers


Plafones



42  
MULTI 30 PC



43  
MULTI 40 PC



44  
CLY



45  
ELIA CL  
S2



45  
ELIA CL  
M2



45  
ELIA EL

Posts / garden co-ords

Pollerleuchten

Mastjes / tuinverlichting

Potelet et coordonnées  
jardin

Postes de Jardin



46  
STILO+ MIDI



46  
STILO+ MAXI



47  
PADO 600



47  
PADO BASIC



# Architectural

## Ceiling surface

Deckenanbauleuchten

Plafond  
opbouwarmaturen

Appliques plafond

Luminarias de techo



48  
QUASAR 10  
CEILING



48  
QUASAR 30  
CEILING

## Wall surface

Wandanbauleuchten

Wand opbouwarmaturen

Appliques murales

Luminarias de pared



49  
QUASAR 10



50  
QUASAR 20



51  
QUASAR 30



52  
ORION H



52  
ORION V



53  
SHIELD+ 1



53  
SHIELD+ 2

## Step lighting

Stufenbeleuchtung

Oriëntatieverlichting

Marqueur de chemin

Illuminación rasante



54  
INSERT+ ZERO



54  
INSERT+ ZERO  
CLIPS



55  
INSERT+ ZERO  
GLASS



56  
INSERT+ 1



56  
INSERT+ 2

## Bollards

Pollerleuchten

Bollards

Bornes

Bolardos/balizas



58  
MIMIK 10 POST  
300



58  
MIMIK 10 POST  
600



58  
MIMIK 10 POST  
1000


## Feature Spot Lights

Scheinwerfer

Schijnwerpers

Projecteurs

Proyectoros



59  
TYK+ 10



60  
FOCUS+ ZERO KIT



60  
FOCUS+ ZERO


## Ingrounds

Bodeneinbauleuchten

Grond inbouwarmaturen

Encastrés de sol

Empotrables de suelo



61  
CRICKET+ 10

# Sports and Area

Floodlighting  
Scheinwerfer  
Schijnwerpers  
Projecteurs  
Proyectores



# Urban and Street

Area lighting  
Stadt- und Parkleuchten  
Terreinverlichting  
Aménagements urbains  
Iluminación áreas urbanas



74  
HEDO

Street lighting  
Straßenleuchten  
Straatverlichting  
Éclairage routier  
Iluminación vías públicas




















75  
SPIDER+ POST















76  
LYRA+



# International protection marking

 Protection against solid objects greater than 12 mm. No protection against water.	 Protection against solid objects greater than 1,0 mm. Protection against spraying water.	 Dust-protected. Protection against splashing water.	 Total dust protection and total protection against hard splashing water.
 Protection against entry of solid objects $\varnothing \geq 12$ mm and against rain.	 Protection against solid objects greater than 1,0 mm. Protection against splashing water.	 Dust-protected. Protection against water jets.	 Dust-tight. Protection against the effects of temporary immersion.
 Protection against solid objects greater than 1,0 mm. No protection against water.	 Protection against solid objects greater than 1,0 mm. Protection against water jets.	 Dust-tight. Protection against splashing water.	 Fully dust protected. Protected against the effects of permanent immersion.
 Protection against solid objects greater than 1,0 mm. Protection against vertically falling water drops.	 Dust-protected. No protection against water.	 Dust-tight. Protection against water jets.	 Dust-tight. Protection against powerful high-temperature water jets.
 Mechanical resistance to impacts of the diffuser			




# Mechanical characteristics

 Water drain	 Easing maintenance	 Through wiring connection	 Quick installation
 Side cable entry	 Luminaires bearing this symbol can be mounted on limited surface temperatures.	 Glow wire resistance	 Water stop
 Continuous mounted luminaire	 Luminaires bearing this symbol can be mounted on normally inflammable surfaces.	 Heavy use conditions	 Loop through























# Listings


 CE certified	 RCM certified	 Drive-over luminaire	 Full cut-off
 ENEC certified	 Cool touch	 DIN EN 12464-1 conform	 ULR (Upward Light Ratio) nominal value, device not inclined.
 EAC certified	 Walk-over luminaire	 DIN 18032-3 conform	 3° CIE flow code corresponding to 3 n / 2 sr (75.5°).

# Protection degree class

 Class I luminaire. Luminaire with security earthing.	 Class II luminaire. Reinforced or double insulated luminaire without earth protection.	 Class III luminaire. SELV (Safety Extra Low-Voltage) luminaire which can only be fed by an extra low voltage supply (i.e. less than 50 Volts). Class III luminaires may not be earthed.
--	---	--

# Electronic features

 Double switch	 Dimmable 1-10V	 Power levels selectable during installation	 Fuse
 Dawn-dusk switch	 Dimmable DALI	 SMART light monitor	 Hot restrike
 Constant light / presence control	 DMX dimming function	 Human Centric Lighting	 Emergency luminaire 1 h
 High frequency motion sensor	 Dynamic white	 Automatic derating	 Emergency luminaire 2 h
 Infrared motion sensor	 RGBW	 Pilot wire command derating	 Emergency luminaire 3 h
 Colour rendering index Ra $\geq 90$	 Colour temperature selectable during installation		

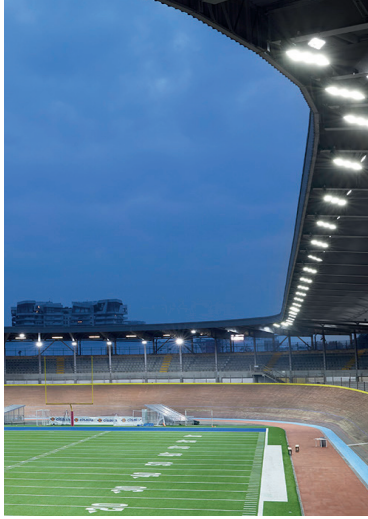

# ELIA AL



White / Textured



Scan the QR-code for the latest information

## ELIA AL - S2

IP40/54 - IK06 - 750 °C


LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	WIRING	LUMINAIRE LUMEN OUTPUT (LM)	CLOUR / FINISH	PART NUMBER	PRONTO
-----------------------	-------	------	-----	--------	-------	--------	-----------------------------	----------------	-------------	--------

### Power LED 220-240 V 50/60 Hz

18	II	✓	80	4000	60°	Stand alone	2100	<input type="checkbox"/>	<b>GW F1 410 GH840*</b>	
----	----	---	----	------	-----	-------------	------	--------------------------	-------------------------	--

### Power LED - dimmable DALI 220-240 V 50/60 Hz

18	II	✓	80	4000	60°	Stand alone	2100	<input type="checkbox"/>	<b>GW F1 411 GH840*</b>	
----	----	---	----	------	-----	-------------	------	--------------------------	-------------------------	--



## ELIA AL - M2

IP40/54 - IK06 - 750 °C


LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	WIRING	LUMINAIRE LUMEN OUTPUT (LM)	CLOUR / FINISH	PART NUMBER	PRONTO
-----------------------	-------	------	-----	--------	-------	--------	-----------------------------	----------------	-------------	--------

### Power LED 220-240 V 50/60 Hz

25	II	✓	80	4000	60°	Stand alone	2800	<input type="checkbox"/>	<b>GW F1 410 MH840*</b>	
----	----	---	----	------	-----	-------------	------	--------------------------	-------------------------	--

### Power LED - dimmable DALI 220-240 V 50/60 Hz

25	II	✓	80	4000	60°	Stand alone	2800	<input type="checkbox"/>	<b>GW F1 411 MH840*</b>	
----	----	---	----	------	-----	-------------	------	--------------------------	-------------------------	--



\* The products have guaranteed availability "PRONTO" while stocks last.



# DLSB LED



WH-RAL9016 / White RAL9016 / Textured

Scan the QR-code for the latest information


## DLSB150 LED OPAL COVER - 95 MM

IP20 - IK07 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	EN EN 12464-1	CRI	KELVIN	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PHOTO
-----------------------	-------	------	---------------	-----	--------	-------------------------------	-----------------------------	----------------	-------------	-------

### Power LED 220-240 V 50/60 Hz

24	I	-	-	80	4000	3010	1990	<input type="checkbox"/>	<b>815712334001</b>	
19	I	-	-	80	4000	2510	1700	<input type="checkbox"/>	<b>815711834001</b>	




## DLSB185 LED OPAL COVER - 95 MM

IP20 - IK07 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	EN EN 12464-1	CRI	KELVIN	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PHOTO
-----------------------	-------	------	---------------	-----	--------	-------------------------------	-----------------------------	----------------	-------------	-------

### Power LED 220-240 V 50/60 Hz

26	I	-	-	80	4000	3410	2440	<input type="checkbox"/>	<b>818712434001</b>	
18	I	-	-	80	4000	2460	1900	<input type="checkbox"/>	<b>818711634001</b>	




## DLSB220 LED OPAL COVER - 95 MM

IP20 - IK07 - 650 °C



LUMINAIRE WATTAGE [W]	CLASS	ENEC	EN EN 12464-1	CRI	KELVIN	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PHOTO
-----------------------	-------	------	---------------	-----	--------	-------------------------------	-----------------------------	----------------	-------------	-------

### Power LED 220-240 V 50/60 Hz

26	I	-	-	80	4000	3850	2940	<input type="checkbox"/>	<b>822721234001</b>	
----	---	---	---	----	------	------	------	--------------------------	---------------------	--



# DL ROUND




Scan the QR-code for the latest information

## DL ROUND MIDI

IP20 - IK07 - 650 °C


LUMINAIRE WATTAGE (W)	CLASS	ENEC	EN EN 12464-1	CRI	KELVIN	LIGHTS SOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	PART NUMBER	PRONTO
<b>Power LED 220-240 V 50/60 Hz</b>										
13	I	-	-	90	3000	1900	1640		<b>3108964</b>	



## DL ROUND MAXI

IP20 - IK07 - 650 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	EN EN 12464-1	CRI	KELVIN	LIGHTS SOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	PART NUMBER	PRONTO
<b>Power LED 220-240 V 50/60 Hz</b>										
21	I	-	-	80	4000	3500	3130		<b>3108978</b>	
15	I	-	-	80	4000	2500	2260		<b>3108972</b>	




## Optional accessories

DESCRIPTION	COLOR	PART NUMBER	PRONTO
<b>DL ROUND MAXI</b>			
Louvre reflector DL ROUND MAXI		<b>3109012</b>	



3109012

# DL SQUARE




Scan the QR-code for the latest information

## DL SQUARE MAXI


IP20 - IK07 - 650 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	EN EN 12464-1	CRI	KELVIN	LIGHTS SOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	PART NUMBER	PRONTO
<b>Power LED 220-240 V 50/60 Hz</b>										
15	I	-	-	80	4000	2500	2260		<b>3108996</b>	



## Optional accessories

DESCRIPTION	COLOR	PART NUMBER	PRONTO
<b>DL SQUARE MAXI</b>			
Louvre reflector DL SQUARE MAXI		<b>3109020</b>	



3109020



# MANGO+ MIDI



Scan the QR-code for the latest information

WH-RAL9010 / White RAL9010 / Textured


## MANGO+ MIDI MULTIPOWER

IP20 - IK07 - 650 °C


LUMINAIRE WATTAGE [W]	CLASS	ENEC	ENEC LABEL	CEI	KELVIN	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRONTO
-----------------------	-------	------	------------	-----	--------	--------------------------------	-----------------------------	----------------	-------------	--------

Power LED 220-240 V 50/60 Hz

11.5/15	II	-	-	80	4000	1980	1496	<input type="checkbox"/>	<b>3109843</b>	
11.5/15	II	-	-	80	3000	1926	1455	<input type="checkbox"/>	<b>3109842</b>	



# MANGO+ MAXI



Scan the QR-code for the latest information

WH-RAL9010 / White RAL9010 / Textured


## MANGO+ MAXI MULTIPOWER

IP20 - IK07 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	ENEC LABEL	CEI	KELVIN	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRONTO
-----------------------	-------	------	------------	-----	--------	--------------------------------	-----------------------------	----------------	-------------	--------

Power LED 220-240 V 50/60 Hz

18.5/24	II	-	-	80	4000	3450	2605	<input type="checkbox"/>	<b>3109851</b>	
18.5/24	II	-	-	80	3000	3354	2555	<input type="checkbox"/>	<b>3109850</b>	



# FL ROUND 333 AB



Scan the QR-code for the latest information

- BK-RAL9005 / Black RAL9005 / Textured
- WH-RAL9016 / White RAL9016 / Textured

## FL ROUND 333 AB OP CORONA


IP20 - IK06 - 650 °C



LUMINAIRE WATTAGE (W)	CLASS	ENEC	EN EN 12664-1	CEI	KELVIN	LIGHT SOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	PART NUMBER	PHOTO
-----------------------	-------	------	---------------	-----	--------	--------------------------------	-----------------------------	----------------	-------------	-------

### Power LED 220-240 V 50/60 Hz

26	I	-	-	80	4000	4100	3270	■	<b>3116316</b>	
26	I	-	-	80	3000	3980	3180	■	<b>3116315</b>	
26	I	-	-	80	4000	4100	3270	□	<b>8333691263410</b>	
26	I	-	-	80	3000	3980	3180	□	<b>8333691263310</b>	



max 3,5 kg

# FL ROUND 555 AB



Scan the QR-code for the latest information

- BK-RAL9005 / Black RAL9005 / Textured
- WH-RAL9016 / White RAL9016 / Textured

## FL ROUND 555 AB OP CORONA

IP20 - IK06 - 650 °C



LUMINAIRE WATTAGE (W)	CLASS	ENEC	EN EN 12664-1	CEI	KELVIN	LIGHT SOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	PART NUMBER	PHOTO
-----------------------	-------	------	---------------	-----	--------	--------------------------------	-----------------------------	----------------	-------------	-------

### Power LED 220-240 V 50/60 Hz

50	I	-	-	80	4000	7700	6390	■	<b>3116324</b>	
50	I	-	-	80	3000	7470	6190	■	<b>3116323</b>	
50	I	-	-	80	4000	7700	6390	□	<b>8555691513410</b>	
50	I	-	-	80	3000	7470	6190	□	<b>8555691513310</b>	



max 5,4 kg

# WL ROUND



■ GR-94 / Metallic grey / Textured



Scan the QR-code for the latest information

## WL220 OPAL

IP20 - IK05 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRONTO
10/15	II	-	80	3000/4000	S/B	-	1900	1550	■	<b>3105557</b>	



## WL270 OPAL

IP20 - IK05 - 650 °C


LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRONTO
10/18/24	II	-	80	3000/4000	S/B	-	3300	2650	■	<b>3105559</b>	



## WL400 OPAL

IP20 - IK05 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRONTO
29/38	II	-	80	3000/4000	S/B	-	4800	3890	■	<b>3105561</b>	



# WL SQUARE



■ GR-94 / Metallic grey / Textured



Scan the QR-code for the latest information

## WL210 OPAL

IP20 - IK05 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRONTO
10/15	II	-	80	3000/4000	S/B	-	2000	1620	■	<b>3105556</b>	



## WL260 OPAL

IP20 - IK05 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRONTO
10/18/24	II	-	80	3000/4000	S/B	-	3350	2720	■	<b>3105558</b>	




## WL390 OPAL

IP20 - IK05 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRONTO
29/38	II	-	80	3000/4000	S/B	-	5000	4020	■	<b>3105560</b>	



# SL713+ PL



Scan the QR-code for the latest information

■ GR-RAL9006 / Grey RAL9006 / Textured


## SL713+ PL MP S/C

IP20 - IK05 - 650 °C


LUMINAIRE WATTAGE [W]	CLASS	EMEC	DM EN 12464-1	CRI	KELVIN	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	LENGTH [mm]	PART NUMBER	PRONTO
-----------------------	-------	------	---------------	-----	--------	--------------------------------	-----------------------------	----------------	-------------	-------------	--------

Power LED 220-240 V 50/60 Hz

69		-	✓	80	4000	11010	9010	■		<b>3111530</b>	
----	--	---	---	----	------	-------	------	---	--	----------------	--



# SL629 PL



Scan the QR-code for the latest information

■ GR-RAL9006 / Grey RAL9006 / Textured  
 □ WH-RAL9016 / White RAL9016 / Textured


## SL629 PL PRISM D/I

IP20 - IK05 - 650 °C


LUMINAIRE WATTAGE [W]	CLASS	EMEC	DM EN 12464-1	CRI	KELVIN	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	LENGTH [mm]	PART NUMBER	PRONTO
-----------------------	-------	------	---------------	-----	--------	--------------------------------	-----------------------------	----------------	-------------	-------------	--------

Power LED 220-240 V 50/60 Hz

69		✓	✓	80	4000	12000	8680	■		<b>8629461783430</b>	
69		✓	✓	80	4000	12000	8680	□		<b>8629461783410</b>	
69		✓	✓	80	3000	11640	8420	□		<b>8629461783310</b>	
54		✓	✓	80	4000	8900	6830	■		<b>8629461543430</b>	
54		✓	✓	80	4000	8900	6830	□		<b>8629461543410</b>	



# SL629 AB



Scan the QR-code for the latest information

- GR-RAL9006 / Grey RAL9006 / Textured
- WH-RAL9016 / White RAL9016 / Textured


## SL629 AB PRISM

IP20 - IK05 - 650 °C



LUMINAIRE WATTAGE [W]	CLASS	EMEC	ON/OFF 12864-1	CRI	KELVIN	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	LENGTH [mm]	PART NUMBER	PRONTO
-----------------------	-------	------	----------------	-----	--------	--------------------------------	-----------------------------	----------------	-------------	-------------	--------

### Power LED 220-240 V 50/60 Hz

69	I	✓	-	80	4000	12000	8070	■	1244	<b>8629661613430</b>	
69	I	✓	-	80	4000	12000	8070	□	1244	<b>8629661613410</b>	
54	I	✓	-	80	4000	8900	5970	■	1544	<b>8629661453430</b>	
54	I	✓	-	80	4000	8900	5970	□	1544	<b>8629661453410</b>	



# PLATO 600




Scan the QR-code for the latest information

WH-87 / White / Textured

## PLATO 600 MP


IP40 - IK06 - 750 °C

LUMINAIRE WATTAGE [W]	CLASS	EMEC	EMC EN 12464-1	CRI	KELVIN	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	LENGTH [mm]	PART NUMBER	PRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
32	II	-	✓	80	4000	5054	4080	<input type="checkbox"/>		<b>3116608</b>	
32	II	-	✓	80	3000	4718	3848	<input type="checkbox"/>		<b>3116607</b>	




## Optional accessories

DESCRIPTION	COLOR	PART NUMBER	PRONTO
<b>PLATO 600</b>			
Ceiling kit		<b>3116983</b>	
Suspension kit		<b>3116616</b>	




3116983



3116616

# PLATO 625




Scan the QR-code for the latest information

WH-RAL9016 / White RAL9016 / Textured

## PLATO 625 OP MULTIPOWER

IP20 - IK06 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	EMEC	EMC EN 12464-1	CRI	KELVIN	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	LENGTH [mm]	PART NUMBER	PRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
23/29/35/41	I	-	-	80	4000	6500	4880	<input type="checkbox"/>		<b>3114723</b>	
23/29/35/41	I	-	-	80	3000	6500	4890	<input type="checkbox"/>		<b>3114722</b>	




## Optional accessories

DESCRIPTION	COLOR	PART NUMBER	PRONTO
<b>PLATO 625</b>			
Ceiling rose	<input type="checkbox"/>	<b>890000410</b>	
Y-wire suspension (1,5 m)		<b>86252015</b>	





890000410



86252015

# ELA 600



Scan the QR-code for the latest information

WH-87 / White / Textured

## ELA 600 PR

IP40 - IK06 - 750 °C

LUMINAIRE WATTAGE [W]	CLASS	EMEC	DM EN 12464-1	CRI	KELVIN	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	LENGTH [mm]	PART NUMBER	PRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
32	II	-	✓	80	4000	4600	3988	<input type="checkbox"/>	595	<b>3116604</b>	
32	II	-	✓	80	3000	4380	3590	<input type="checkbox"/>	595	<b>3116603</b>	



# ELA 625




Scan the QR-code for the latest information

WH-RAL9016 / White RAL9016 / Textured


## ELA 625 PR

IP20 - IK06 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	EMEC	DM EN 12464-1	CRI	KELVIN	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	LENGTH [mm]	PART NUMBER	PRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
33	I	-	✓	80	4000	-	4150	<input type="checkbox"/>	620	<b>3118517</b>	
33	I	-	✓	80	3000	-	3720	<input type="checkbox"/>	620	<b>3118516</b>	
<b>Power LED - dimmable DALI 220-240 V 50/60 Hz</b>											
33	I	-	✓	80	4000	-	4150	<input type="checkbox"/>	620	<b>3118519</b>	
33	I	-	✓	80	3000	-	3720	<input type="checkbox"/>	620	<b>3118518</b>	



# ELIA PL

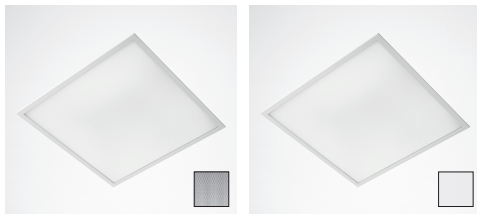

Scan the QR-code for the latest information

White / Textured


## ELIA PL - M2 60x60 - MICROPRISMATIC

IP20/40 - IK03 - 650 °C

LUMINAIRE SURFACE (W)	CLASS	ENEC	EN EN 12464-1	CRI	KELVIN	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	LENGTH (mm)	PART NUMBER	PRONTO
-----------------------	-------	------	---------------	-----	--------	-----------------------------	----------------	-------------	-------------	--------

### Power LED 220-240 V 50/60 Hz

33	II	✓	✓	80	4000	4300	□	595	<b>GW F1 610 MN840</b>	
33	II	✓	✓	90	4000	3600	□	595	<b>GW F1 610 MN940</b>	



## ELIA PL - M2 60x60 - OPAL

IP20/40 - IK03 - 650 °C

LUMINAIRE SURFACE (W)	CLASS	ENEC	EN EN 12464-1	CRI	KELVIN	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	LENGTH (mm)	PART NUMBER	PRONTO
-----------------------	-------	------	---------------	-----	--------	-----------------------------	----------------	-------------	-------------	--------

### Power LED 220-240 V 50/60 Hz


33	II	✓	-	80	4000	4300	□	595	<b>GW F1 610 MA840</b>	
33	II	✓	-	90	4000	3600	□	595	<b>GW F1 610 MA940</b>	

## Optional accessories

DESCRIPTION	COLOR	PART NUMBER	PRONTO
<b>ELIA PL - M2 60x60</b>			
ELIA PL kit surface mounting 60x60		<b>GW F1 911</b>	
Kit suspension 4 cables		<b>GW F1 921</b>	
Kit 4 clips for recessed		<b>GW F1 922</b>	
Safety cable		<b>GW F1 923</b>	



GW F1 911




GW F1 922





# ELIA PL



Scan the QR-code for the latest information

White / Textured


## ELIA PL - M3 62x62 - MICROPRISMATIC

IP20/40 - IK03 - 650 °C

LUMINAIRE WEIGHT [kg]	CLASS	ENEC	EN 12464-1	CRI	KELVIN	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / ENDF	LENGTH [mm]	PART NUMBER	PRONTO
-----------------------	-------	------	------------	-----	--------	-----------------------------	--------------	-------------	-------------	--------

Power LED 220-240 V 50/60 Hz

33	II	✓	✓	80	4000	4300	□	620	<b>GW F1 610 NN840</b>	
----	----	---	---	----	------	------	---	-----	------------------------	--




## Optional accessories

DESCRIPTION	COLOR	PART NUMBER	PRONTO
<b>ELIA PL - M3 62x62</b>			
ELIA PL kit surface mounting 62x62		<b>GW F1 912</b>	
Kit suspension 4 cables		<b>GW F1 921</b>	
Kit 4 clips for recessed		<b>GW F1 922</b>	
Safety cable		<b>GW F1 923</b>	




GW F1 912



GW F1 922



# ELIA PL BACKLIT



Scan the QR-code for the latest information

White / Textured


## ELIA PL BACKLIT - M2 60x60 - OPAL

IP20/40 - IK03 - 650 °C


LUMINAIRE WATTAGE [W]	CLASS	ENEC	EN 12464-1	CEI	KELVIN	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	LENGTH [mm]	PART NUMBER	PRONTO
-----------------------	-------	------	------------	-----	--------	-----------------------------	----------------	-------------	-------------	--------

Power LED 220-240 V 50/60 Hz

25	II	✓	-	80	4000	3300	<input type="checkbox"/>	595	<b>GW F1 610 MT840</b>	
----	----	---	---	----	------	------	--------------------------	-----	------------------------	--



# ELIA PL BACKLIT



Scan the QR-code for the latest information

White / Textured

## ELIA PL BACKLIT - M3 62x62 - OPAL


IP20/40 - IK03 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	EN 12464-1	CEI	KELVIN	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	LENGTH [mm]	PART NUMBER	PRONTO
-----------------------	-------	------	------------	-----	--------	-----------------------------	----------------	-------------	-------------	--------


Power LED 220-240 V 50/60 Hz

25	II	✓	-	80	4000	3300	<input type="checkbox"/>	620	<b>GW F1 610 NT840*</b>	
----	----	---	---	----	------	------	--------------------------	-----	-------------------------	--

\* The products have guaranteed availability "PRONTO" while stocks last.



# PLATO 1200




Scan the QR-code for the latest information

WH-87 / White / Textured

## PLATO 1200 MP


IP40 - IK06 - 750 °C

LUMINAIRE WATTAGE [W]	CLASS	EMEC	DMX DI (2464-1)	CRI	KELVIN	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	LENGTH [mm]	PART NUMBER	PRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
32	II	-	✓	80	4000	5240	4245		1195	<b>3116612</b>	
32	II	-	✓	80	3000	4660	3802		1195	<b>3116611</b>	



## Optional accessories

DESCRIPTION	COLOR	PART NUMBER	PRONTO
<b>PLATO 1200</b>			
Suspension kit		<b>3116616</b>	



3116616

# ELIA PL




Scan the QR-code for the latest information

White / Textured

## ELIA PL - M1 30x120 - MICROPRISMATIC

IP20/40 - IK03 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	EMEC	DMX DI (2464-1)	CRI	KELVIN	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	LENGTH [mm]	PART NUMBER	PRONTO
<b>Power LED 220-240 V 50/60 Hz</b>										
33	II	✓	✓	80	4000	4300		1195	<b>GW F1 610 LN840</b>	
33	II	✓	✓	90	4000	3600		1195	<b>GW F1 610 LN940</b>	




## Optional accessories

DESCRIPTION	COLOR	PART NUMBER	PRONTO
<b>ELIA PL - M1 30x120</b>			
ELIA PL kit surface mounting 30x120		<b>GW F1 913</b>	
Kit suspension 4 cables		<b>GW F1 921</b>	
Kit 4 clips for recessed		<b>GW F1 922</b>	
Safety cable		<b>GW F1 923</b>	




GW F1 913



GW F1 922

# LAMA+



WH-87 / White / Textured




Scan the QR-code for the latest information

## LAMA+ S/W

IP66 - IK07 - 750 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CE	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PHOTO
<b>Power LED 220-240 V 50/60 Hz</b>											
206	I	✓	80	4000	S/W	-	34485	29954	<input type="checkbox"/>	<b>06272087</b>	
150	I	✓	80	4000	S/W	-	26766	23489	<input type="checkbox"/>	<b>06280287</b>	




## LAMA+ S/EW

IP66 - IK07 - 750 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CE	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PHOTO
<b>Power LED 220-240 V 50/60 Hz</b>											
206	I	✓	80	4000	S/EW	-	34485	32189	<input type="checkbox"/>	<b>06271887</b>	
150	I	✓	80	4000	S/EW	-	26766	25165	<input type="checkbox"/>	<b>06280087</b>	
99	I	✓	80	4000	S/EW	-	19229	17402	<input type="checkbox"/>	<b>06271987</b>	
64	I	✓	80	4000	S/EW	-	12815	11994	<input type="checkbox"/>	<b>06280187</b>	

Identifying and classifying our optics



# LAMA+ MINI




Scan the QR-code for the latest information

WH-87 / White / Textured


## LAMA+ MINI S/EW

IP66 - IK06

LUMINOUS WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR/ FINISH	PART NUMBER	PHOTO
<b>Power LED 220-240 V 50/60 Hz</b>											
101	I	-	80	4000	S/EW	-	16732	14765	<input type="checkbox"/>	<b>3101188</b>	
72	I	-	80	4000	S/EW	-	12479	11332	<input type="checkbox"/>	<b>3101189</b>	



Identifying and classifying our optics



# SMART[4] 1M



■ Grey RAL7035 / Textured




Scan the QR-code for the latest information

## SMART[4] 1M HE

IP66 - IK08 - 850 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	WIRING	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	PART NUMBER	PRONTO
Power LED 220-240 V 50/60 Hz										
52	I	✓	80	4000	90°	Stand alone	7700	■	<b>GW S4 120 AP840</b>	
52	I	✓	80	4000	Array	Stand alone	7700	■	<b>GW S4 120 AA840</b>	




## SMART[4] 1M HLO

IP66 - IK08 - 850 °C


LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	WIRING	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	PART NUMBER	PRONTO
Power LED 220-240 V 50/60 Hz										
64	I	✓	80	4000	90°	Stand alone	9900	■	<b>GW S4 120 BP840</b>	
64	I	✓	80	4000	Array	Stand alone	9900	■	<b>GW S4 120 BA840</b>	

Identifying and classifying our optics




## Optional accessories

DESCRIPTION	COLOR	PART NUMBER	PRONTO
SMART[4] 1M			
Floodlight bracket kit 1 m		<b>GW L1 943</b>	



GW L1 943

# SMART[4] 2M




Scan the QR-code for the latest information

■ Grey RAL7035 / Textured

## SMART[4] 2M HE

IP66 - IK08 - 850 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	WIRING	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	PART NUMBER	PRONTO
<b>Power LED 220-240 V 50/60 Hz</b>										
95	I	✓	80	4000	90°	Stand alone	15400	■	<b>GW S4 220 AP840</b>	
95	I	✓	80	4000	Array	Stand alone	15400	■	<b>GW S4 220 AA840</b>	




## SMART[4] 2M HLO

IP66 - IK08 - 850 °C


LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	WIRING	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	PART NUMBER	PRONTO
<b>Power LED 220-240 V 50/60 Hz</b>										
125	I	✓	80	4000	90°	Stand alone	19800	■	<b>GW S4 220 BP840</b>	
125	I	✓	80	4000	Array	Stand alone	19800	■	<b>GW S4 220 BA840</b>	

Identifying and classifying our optics




## Optional accessories

DESCRIPTION	COLOR	PART NUMBER	PRONTO
<b>SMART[4] 2M</b>			
Wall/ceiling-mounting fixing kit		<b>GW L1 927</b>	
Floodlight bracket kit 2 m		<b>GW L1 944</b>	



GW L1 927



GW L1 944

# A+



■ BK-RAL9005 / Black RAL9005 / Textured

Scan the QR-code for the latest information


## A+ 60 C/EW

IP65 - IK08 - 960 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRINTO
-----------------------	-------	------	-----	--------	-------	------------	-------------------------------	-----------------------------	----------------	-------------	--------

Power LED 220-240 V 50/60 Hz

60	I	-	80	4000	C/EW	-	9630	8456	■	<b>3111273</b>	
----	---	---	----	------	------	---	------	------	---	----------------	--




## A+ 100 C/EW

IP65 - IK08 - 960 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRINTO
-----------------------	-------	------	-----	--------	-------	------------	-------------------------------	-----------------------------	----------------	-------------	--------

Power LED dimmable 1-10 V 220-240 V 50/60 Hz

100	I	-	80	4000	C/EW	-	16000	13903	■	<b>3111274</b>	
-----	---	---	----	------	------	---	-------	-------	---	----------------	--




## A+ 150 C/EW

IP65 - IK08 - 960 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRINTO
-----------------------	-------	------	-----	--------	-------	------------	-------------------------------	-----------------------------	----------------	-------------	--------

Power LED dimmable 1-10 V 220-240 V 50/60 Hz

150	I	-	80	4000	C/EW	-	24000	20713	■	<b>3111275</b>	
-----	---	---	----	------	------	---	-------	-------	---	----------------	--




## A+ 200 C/EW

IP65 - IK08 - 960 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRINTO
-----------------------	-------	------	-----	--------	-------	------------	-------------------------------	-----------------------------	----------------	-------------	--------

Power LED dimmable 1-10 V 220-240 V 50/60 Hz

200	I	-	80	4000	C/EW	-	32000	27222	■	<b>3111276</b>	
-----	---	---	----	------	------	---	-------	-------	---	----------------	--



## Optional accessories

DESCRIPTION	COLOR	PART NUMBER	PRINTO
A+ 100 / A+ 150 / A+ 200			
Microwave motion sensor		<b>3111277</b>	
Remote control A+		<b>3111278</b>	




3111277



3111278



# ELIA HL




Scan the QR-code for the latest information

■ Black / Textured

## ELIA HL - M2

IP65 - IK08 - 750 °C


LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	WIRING	LUMINAIRE LUMEN OUTPUT [lm]	COLOR/ FINISH	PART NUMBER	PRONTO
<b>Power LED 220-240 V 50/60 Hz</b>										
120	I	✓	80	4000	120°	Stand alone	18000	■	<b>GW F1 000 MM840</b>	
120	I	✓	80	4000	90°	Stand alone	18200	■	<b>GW F1 000 ML840</b>	



## ELIA HL - M3

IP65 - IK08 - 750 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	WIRING	LUMINAIRE LUMEN OUTPUT [lm]	COLOR/ FINISH	PART NUMBER	PRONTO
<b>Power LED 220-240 V 50/60 Hz</b>										
150	I	✓	80	4000	120°	Stand alone	22500	■	<b>GW F1 000 NM840</b>	
150	I	✓	80	4000	90°	Stand alone	22800	■	<b>GW F1 000 NL840</b>	




## ELIA HL - L2

IP65 - IK08 - 750 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	WIRING	LUMINAIRE LUMEN OUTPUT [lm]	COLOR/ FINISH	PART NUMBER	PRONTO
<b>Power LED 220-240 V 50/60 Hz</b>										
200	I	✓	80	4000	120°	Stand alone	30000	■	<b>GW F1 000 QM840</b>	
200	I	✓	80	4000	90°	Stand alone	30300	■	<b>GW F1 000 QL840</b>	



# SMART[3]



Scan the QR-code for the latest information

■ Grey RAL7035 / Matt


## SMART[3] - 800 - OPAL DIFFUSER

IP66/69 - IK08 - 850 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	WIRING	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	LENGTH [mm]	PART NUMBER	PRIORITY
-----------------------	-------	------	-----	--------	--------	-----------------------------	----------------	-------------	-------------	----------

### Power LED 220-240 V 50/60 Hz

15	II	✓	80	4000	Stand alone	1600	■	800	<b>GW S3 118 P</b>	
27	II	✓	80	4000	Stand alone	3200	■	800	<b>GW S3 218 P</b>	



## SMART[3] - 800 - TRANSPARENT DIFFUSER

IP66/69 - IK08 - 850 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	WIRING	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	LENGTH [mm]	PART NUMBER	PRIORITY
-----------------------	-------	------	-----	--------	--------	-----------------------------	----------------	-------------	-------------	----------

### Power LED 220-240 V 50/60 Hz

15	II	✓	80	4000	Stand alone	1700	■	800	<b>GW S3 118 T</b>	
27	II	✓	80	4000	Stand alone	3400	■	800	<b>GW S3 218 T</b>	

## SMART[3] - 1200 - OPAL DIFFUSER

IP66/69 - IK08 - 850 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	WIRING	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	LENGTH [mm]	PART NUMBER	PRIORITY
-----------------------	-------	------	-----	--------	--------	-----------------------------	----------------	-------------	-------------	----------

### Power LED 220-240 V 50/60 Hz

20	II	✓	80	4000	Stand alone	2500	■	1200	<b>GW S3 136 P</b>	
20	II	✓	80	4000	Through wiring	2500	■	1200	<b>GW S3 136 PL</b>	
40	II	✓	80	4000	Stand alone	5000	■	1200	<b>GW S3 236 P</b>	
40	II	✓	80	4000	Through wiring	5000	■	1200	<b>GW S3 236 PL</b>	
40	II	✓	80	5700	Stand alone	5000	■	1200	<b>GW S3 236 P 57K</b>	
40	II	✓	80	5700	Through wiring	5000	■	1200	<b>GW S3 236 PL 57K</b>	



## SMART[3] - 1200 - TRANSPARENT DIFFUSER

IP66/69 - IK08 - 850 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	WIRING	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	LENGTH [mm]	PART NUMBER	PRIORITY
-----------------------	-------	------	-----	--------	--------	-----------------------------	----------------	-------------	-------------	----------

### Power LED 220-240 V 50/60 Hz

20	II	✓	80	4000	Stand alone	2600	■	1200	<b>GW S3 136 T</b>	
20	II	✓	80	4000	Through wiring	2600	■	1200	<b>GW S3 136 TL</b>	
40	II	✓	80	4000	Stand alone	5200	■	1200	<b>GW S3 236 T</b>	
40	II	✓	80	4000	Through wiring	5200	■	1200	<b>GW S3 236 TL</b>	
40	II	✓	80	5700	Stand alone	5200	■	1200	<b>GW S3 236 T 57K</b>	

## SMART[3] - 1600 - OPAL DIFFUSER

IP66/69 - IK08 - 850 °C

LUMINAIRE VOLTAGE (V)	CLASS	ENERG	CRI	KELVIN	WIRING	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	LENGTH (mm)	PART NUMBER	PRONTO
-----------------------	-------	-------	-----	--------	--------	-----------------------------	----------------	-------------	-------------	--------

### Power LED 220-240 V 50/60 Hz

26	II	✓	80	4000	Stand alone	3250	■	1600	<b>GW S3 158 P</b>	
26	II	✓	80	4000	Through wiring	3250	■	1600	<b>GW S3 158 PL</b>	
50	II	✓	80	4000	Stand alone	6400	■	1600	<b>GW S3 258 P</b>	
50	II	✓	80	4000	Through wiring	6400	■	1600	<b>GW S3 258 PL</b>	
50	II	✓	80	5700	Stand alone	6400	■	1600	<b>GW S3 258 P 57K</b>	
50	II	✓	80	5700	Through wiring	6400	■	1600	<b>GW S3 258 PL 57K</b>	



## SMART[3] - 1600 - TRANSPARENT DIFFUSER

IP66/69 - IK08 - 850 °C

LUMINAIRE VOLTAGE (V)	CLASS	ENERG	CRI	KELVIN	WIRING	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	LENGTH (mm)	PART NUMBER	PRONTO
-----------------------	-------	-------	-----	--------	--------	-----------------------------	----------------	-------------	-------------	--------

### Power LED 220-240 V 50/60 Hz

26	II	✓	80	4000	Stand alone	3400	■	1600	<b>GW S3 158 T</b>	
26	II	✓	80	4000	Through wiring	3400	■	1600	<b>GW S3 158 TL</b>	
50	II	✓	80	4000	Stand alone	6700	■	1600	<b>GW S3 258 T</b>	
50	II	✓	80	4000	Through wiring	6700	■	1600	<b>GW S3 258 TL</b>	
50	II	✓	80	5700	Stand alone	6700	■	1600	<b>GW S3 258 T 57K</b>	
50	II	✓	80	5700	Through wiring	6700	■	1600	<b>GW S3 258 TL 57K</b>	

## Optional accessories

DESCRIPTION	COLOR	PART NUMBER	PRONTO
-------------	-------	-------------	--------

### SMART[3]

Bracket for fixing to the wall - 30° or 45°

**GW S3 191**



Male connector 4P -10 A

**GW S3 194**



Throughout line connection kit

**GW S3 197**



GW S3 194



# SMART[3]le




Scan the QR-code for the latest information

■ Grey RAL7035 / Matt

## SMART[3]le - 800 - OPAL DIFFUSER

IP66/69 - IK08 - 850 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	WIRING	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	LENGTH [mm]	PART NUMBER	PRONTO
Power LED 220-240 V 50/60 Hz										
34	II	✓	80	4000	Stand alone	3700	■	800	<b>GW S3 120 EP840</b>	



## SMART[3]le - 800 - TRANSPARENT DIFFUSER


IP66/69 - IK08 - 850 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	WIRING	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	LENGTH [mm]	PART NUMBER	PRONTO
Power LED 220-240 V 50/60 Hz										
34	II	✓	80	4000	Stand alone	3900	■	800	<b>GW S3 120 ET840</b>	

## SMART[3]le - 1200 - OPAL DIFFUSER

IP66/69 - IK08 - 850 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	WIRING	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	LENGTH [mm]	PART NUMBER	PRONTO
Power LED 220-240 V 50/60 Hz										
52	II	✓	80	4000	Stand alone	6000	■	1200	<b>GW S3 220 EP840</b>	
52	II	✓	80	5700	Stand alone	6000	■	1200	<b>GW S3 220 EP857</b>	



## SMART[3]le - 1200 - TRANSPARENT DIFFUSER

IP66/69 - IK08 - 850 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	WIRING	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	LENGTH [mm]	PART NUMBER	PRONTO
Power LED 220-240 V 50/60 Hz										
52	II	✓	80	4000	Stand alone	6400	■	1200	<b>GW S3 220 ET840</b>	
52	II	✓	80	5700	Stand alone	6400	■	1200	<b>GW S3 220 ET857</b>	


## Optional accessories

DESCRIPTION	COLOR	PART NUMBER	PRONTO
<b>SMART[3]le</b>			
Bracket for fixing to the wall - 30° or 45°		<b>GW S3 191</b>	
Male connector 4P - 10 A		<b>GW S3 194</b>	
Throughout line connection kit		<b>GW S3 197</b>	



GW S3 194

# SMART[3] PLUS



Scan the QR-code for the latest information

■ Grey RAL7035 / Matt


## SMART[3] PLUS - 1600 - OPAL DIFFUSER

IP66/69 - IK08 - 850 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	WIRING	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	LENGTH [mm]	PART NUMBER	PRONTO
-----------------------	-------	------	-----	--------	--------	-----------------------------	----------------	-------------	-------------	--------

Power LED 220-240 V 50/60 Hz

61	II	✓	80	4000	Stand alone	9000	■	1600	<b>GW S3 320 BP840</b>	
61	II	✓	80	5700	Stand alone	9000	■	1600	<b>GW S3 320 BP857</b>	



## SMART[3] PLUS - 1600 - TRANSPARENT DIFFUSER

IP66/69 - IK08 - 850 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	WIRING	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	LENGTH [mm]	PART NUMBER	PRONTO
-----------------------	-------	------	-----	--------	--------	-----------------------------	----------------	-------------	-------------	--------

Power LED 220-240 V 50/60 Hz

61	II	✓	80	4000	Stand alone	9400	■	1600	<b>GW S3 320 BT840</b>	
61	II	✓	80	5700	Stand alone	9400	■	1600	<b>GW S3 320 BT857</b>	

## Optional accessories

DESCRIPTION	COLOR	PART NUMBER	PRONTO
<b>SMART[3] PLUS</b>			
Bracket for fixing to the wall - 30° or 45°		<b>GW S3 191</b>	
Male connector 4P -10 A		<b>GW S3 194</b>	
Throughout line connection kit		<b>GW S3 197</b>	



GW S3 194



# ACRO BASIC



Scan the QR-code for the latest information


■ GR-RAL7035 / Grey RAL7035 / Matt

## ACRO BASIC EQ136

IP66 - IK03 - 650 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CE	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	LENGTH (mm)	PART NUMBER	PRINTO
23	I	✓	80	4000	S/EW	-	-	3000	■	1185	<b>3103939</b>	

Power LED 220-240 V 50/60 Hz




## ACRO BASIC EQ236

IP66 - IK03 - 650 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CE	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	LENGTH (mm)	PART NUMBER	PRINTO
37	I	✓	80	4000	S/EW	-	-	4800	■	1185	<b>3103940</b>	

Power LED 220-240 V 50/60 Hz




## ACRO BASIC EQ158

IP66 - IK03 - 650 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CE	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	LENGTH (mm)	PART NUMBER	PRINTO
29	I	✓	80	4000	S/EW	-	-	4300	■	1477	<b>3103941</b>	

Power LED 220-240 V 50/60 Hz



## ACRO BASIC EQ258

IP66 - IK03 - 650 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CE	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	LENGTH (mm)	PART NUMBER	PRINTO
50	I	✓	80	4000	S/EW	-	-	6800	■	1477	<b>3103942</b>	

Power LED 220-240 V 50/60 Hz

# ACRO PRO



Scan the QR-code for the latest information

■ GR-RAL7035 / Grey RAL7035 / Matt


## ACRO PRO EQ218 MULTIPOWER

IP66 - IK08 - 850 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	LENGTH [mm]	PART NUMBER	PROFITO
-----------------------	-------	------	-----	--------	-------	------------	-------------------------------	-----------------------------	----------------	-------------	-------------	---------

Power LED 220-240 V 50/60 Hz

11.5/15/17/20 | - 80 4000 S/EW - 2800 2506 ■ 615 **3114690**




## ACRO PRO EQ236 MULTIPOWER

IP66 - IK08 - 850 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	LENGTH [mm]	PART NUMBER	PROFITO
-----------------------	-------	------	-----	--------	-------	------------	-------------------------------	-----------------------------	----------------	-------------	-------------	---------

Power LED 220-240 V 50/60 Hz

18/22.5/27.5/31 | - 80 4000 S/EW - 5350 4981 ■ 1174 **3114691**




## ACRO PRO EQ258 MULTIPOWER

IP66 - IK08 - 850 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	LENGTH [mm]	PART NUMBER	PROFITO
-----------------------	-------	------	-----	--------	-------	------------	-------------------------------	-----------------------------	----------------	-------------	-------------	---------

Power LED 220-240 V 50/60 Hz

24/29/36/42 | - 80 4000 S/EW - 7100 6588 ■ 1454 **3114696**



# NORMA+



Scan the QR-code for the latest information

■ GR-RAL7035 / Grey RAL7035 / Matt


## NORMA+ 60

IP65 - IK09 - 750 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE & LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	LENGTH (mm)	PART NUMBER	PRINTO
-----------------------	-------	------	-----	--------	-------	------------	----------------------------------	-----------------------------	----------------	-------------	-------------	--------

### Power LED 220-240 V 50/60 Hz

27	I	-	80	4000	S/EW	-	4077	3258	■	630	<b>305949</b>	
18	I	-	80	4000	S/EW	-	2718	2246	■	630	<b>305948</b>	




## NORMA+ 60 CL

IP65 - IK09 - 750 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE & LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	LENGTH (mm)	PART NUMBER	PRINTO
-----------------------	-------	------	-----	--------	-------	------------	----------------------------------	-----------------------------	----------------	-------------	-------------	--------

### Power LED 220-240 V 50/60 Hz

27	I	-	80	4000	S/EW	-	4077	3258	■	660	<b>305941</b>	
18	I	-	80	4000	S/EW	-	2718	2246	■	660	<b>305940</b>	




## NORMA+ 120

IP65 - IK09 - 750 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE & LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	LENGTH (mm)	PART NUMBER	PRINTO
-----------------------	-------	------	-----	--------	-------	------------	----------------------------------	-----------------------------	----------------	-------------	-------------	--------

### Power LED 220-240 V 50/60 Hz

45	I	-	80	4000	S/EW	-	6795	5215	■	1230	<b>305952</b>	
34	I	-	80	4000	S/EW	-	5134	3932	■	1230	<b>305951</b>	
25	I	-	80	4000	S/EW	-	3775	3002	■	1230	<b>305950</b>	




## NORMA+ 120 CL

IP65 - IK09 - 750 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE & LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	LENGTH (mm)	PART NUMBER	PRINTO
-----------------------	-------	------	-----	--------	-------	------------	----------------------------------	-----------------------------	----------------	-------------	-------------	--------

### Power LED 220-240 V 50/60 Hz

45	I	-	80	4000	S/EW	-	6795	5215	■	1260	<b>305944</b>	
34	I	-	80	4000	S/EW	-	5134	3932	■	1260	<b>305943</b>	
25	I	-	80	4000	S/EW	-	3775	3002	■	1260	<b>305942</b>	




## NORMA+ 150

IP65 - IK09 - 750 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE & LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	LENGTH (mm)	PART NUMBER	PRINTO
-----------------------	-------	------	-----	--------	-------	------------	----------------------------------	-----------------------------	----------------	-------------	-------------	--------

### Power LED 220-240 V 50/60 Hz

60	I	-	80	4000	S/EW	-	9060	7556	■	1530	<b>305954</b>	
----	---	---	----	------	------	---	------	------	---	------	---------------	--




## NORMA+ 150 CL

IP65 - IK09 - 750 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE & LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	LENGTH (mm)	PART NUMBER	PRINTO
-----------------------	-------	------	-----	--------	-------	------------	----------------------------------	-----------------------------	----------------	-------------	-------------	--------

### Power LED 220-240 V 50/60 Hz

68	I	-	80	4000	S/EW	-	10268	8395	■	1560	<b>305947</b>	
60	I	-	80	4000	S/EW	-	9060	7556	■	1560	<b>305946</b>	
35	I	-	80	4000	S/EW	-	5285	4355	■	1560	<b>305945</b>	





# BLIZ




Scan the QR-code for the latest information

- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured

## BLIZ RING

IP65 - IK07

LAMPHOLDER	LUMINAIRE VOLTAGE [V]	CLASS	ENEC	CEI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PHOTO
E27	1x60	I	✓	-	-	S/EW	-	-	-	■	<b>700192</b>	
E27	1x60	I	✓	-	-	S/EW	-	-	-	■	<b>700193</b>	



# EKO+26




Scan the QR-code for the latest information

- AN-96 / Anthracite gray / Textured

## EKO+26

IP66 - IK07

LAMPHOLDER	LUMINAIRE VOLTAGE [V]	CLASS	ENEC	CEI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PHOTO
E27	1x100	I	-	-	-	S/EW	-	-	-	■	<b>302063</b>	



# EKO 21/26




Scan the QR-code for the latest information

- BK-81 / Black / Textured
- WH-87 / White / Textured

## EKO 21

IP44 - IK06 - 750 °C


LAMPHOLDER	LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRONTO
E27	1x15	II	-	-	-	S/EW	-	-	-	■	<b>300455</b>	
E27	1x15	II	-	-	-	S/EW	-	-	-	□	<b>300454</b>	



## EKO 21 GRILL

IP44 - IK06 - 750 °C


LAMPHOLDER	LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRONTO
E27	1x15	II	-	-	-	A/EW	-	-	-	■	<b>300485</b>	
E27	1x15	II	-	-	-	A/EW	-	-	-	□	<b>300484</b>	




## EKO 26

IP44 - IK06 - 750 °C

LAMPHOLDER	LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRONTO
E27	1x23	II	-	-	-	S/EW	-	-	-	□	<b>300334</b>	



# NIKKO+21




Scan the QR-code for the latest information

■ AN-96 / Anthracite gray / Textured

## NIKKO+21

IP65 - IK05

LAMPHOLDER	LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PHOTO
E27	1x60	I	-	-	-	S/EW	-	-	-	■	002002	



# DROP 28




Scan the QR-code for the latest information

□ WH-87 / White / Textured

## DROP 28 LED

IP55 - IK06 - 750 °C


LAMPHOLDER	LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PHOTO
Power LED 220-240 V 50/60 Hz												
LED	16	II	-	80	3000	S/EW	-	2226	1336	□	303063	




## DROP 28

IP55 - IK06 - 750 °C

LAMPHOLDER	LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PHOTO
E27	1x100	II	-	-	-	S/EW	-	-	-	□	004951	



# MULTI+ 30 PC



WH-87 / White / Textured




Scan the QR-code for the latest information

## MULTI+ 30 PC

IP65 - IK10 - 750 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CR	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRINTO
<b>Power LED 220-240 V 50/60 Hz</b>											
16	II	-	80	4000	S/EW	-	2447	1292	<input type="checkbox"/>	<b>304161</b>	
16	II	-	80	3000	S/EW	-	2226	1270	<input type="checkbox"/>	<b>304160</b>	



## MULTI+ 30 PC HF

IP65 - IK10 - 750 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CR	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRINTO
<b>Power LED 230 V 50 Hz</b>											
16	II	-	80	4000	S/EW	-	2447	1292	<input type="checkbox"/>	<b>304169</b>	
16	II	-	80	3000	S/EW	-	2226	1270	<input type="checkbox"/>	<b>304168</b>	



OFF  
0%

ON - SMART  
30%

ON - SMART  
100%

# MULTI+ 40 PC



WH-87 / White / Textured



Scan the QR-code for the latest information


## MULTI+ 40 PC

IP65 - IK10 - 750 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CR	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRINTO
-----------------------	-------	------	----	--------	-------	------------	-------------------------------	-----------------------------	----------------	-------------	--------

### Power LED 220-240 V 50/60 Hz

27	II	-	80	4000	S/EW	-	4284	2278	<input type="checkbox"/>	<b>304127</b>	
27	II	-	80	3000	S/EW	-	4141	2146	<input type="checkbox"/>	<b>304126</b>	




## MULTI+ 40 PC HF

IP65 - IK10 - 750 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CR	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRINTO
-----------------------	-------	------	----	--------	-------	------------	-------------------------------	-----------------------------	----------------	-------------	--------

### Power LED 230 V 50 Hz

27	II	-	80	4000	S/EW	-	4284	2278	<input type="checkbox"/>	<b>304135</b>	
27	II	-	80	3000	S/EW	-	4141	2146	<input type="checkbox"/>	<b>304134</b>	

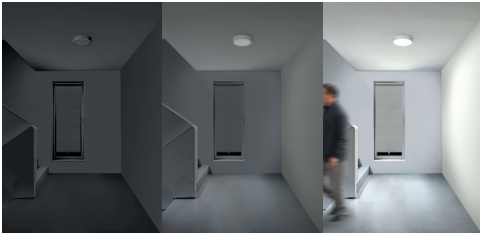

OFF  
0%

ON - SMART  
30%

ON - SMART  
100%

# CLY



Scan the QR-code for the latest information

## CLY


IP65 - IK10 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CR	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PHOTO
<b>Power LED 220-240 V 50/60 Hz</b>											
17	II	-	80	3000/4000	S/EW	-	2534	1695		<b>3116565</b>	

## CLY DLS+DETEK

IP65 - IK10 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CR	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PHOTO
<b>Power LED 220-240 V 50/60 Hz + HF Sensor</b>											
17	II	-	80	3000/4000	S/EW	-	2534	1695		<b>3116566</b>	



## CLY EM/3P


IP65 - IK10 - 850 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CR	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PHOTO
<b>Power LED - Emergency 3h - 220-240 V 50/60 Hz</b>											
17	II	-	80	3000/4000	S/EW	-	2534	1695		<b>3116567</b>	

## CLY EM/3P+DLS+DETEK

IP65 - IK10 - 850 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CR	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PHOTO
<b>Power LED - Emergency 3h - 220-240 V 50/60 Hz + HF Sensor</b>											
17	II	-	80	3000/4000	S/EW	-	2534	1695		<b>3116568</b>	

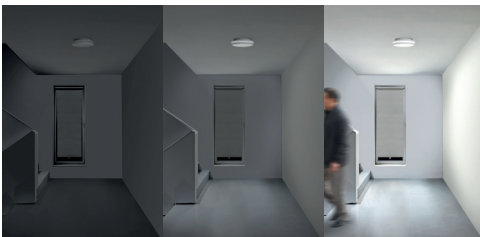

OFF  
0%

ON - DLS+DETEK  
30%

ON - DLS+DETEK  
100%

# ELIA CL



White / Textured



Scan the QR-code for the latest information

## ELIA CL - S2

IP20/54 - IK08 - 750 °C


LUMINAIRE WATTAGE (W)	CLASS	ENERG	CRF	KELVIN	OPTIC	WIRING	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	PART NUMBER	PRONTO
<b>Power LED 220-240 V 50/60 Hz</b>										
12	II	✓	80	4000	Opal	Stand alone	1300	<input type="checkbox"/>	<b>GW F1 310 GA840*</b>	
12	II	✓	80	4000	Opal	Stand alone	1300	<input type="checkbox"/>	<b>GW F1 315 GA840*</b>	



## ELIA CL - M2


IP20/54 - IK08 - 750 °C

LUMINAIRE WATTAGE (W)	CLASS	ENERG	CRF	KELVIN	OPTIC	WIRING	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	PART NUMBER	PRONTO
<b>Power LED 220-240 V 50/60 Hz</b>										
25	II	✓	80	4000	Opal	Stand alone	2600	<input type="checkbox"/>	<b>GW F1 310 MA840*</b>	
25	II	✓	80	4000	Opal	Stand alone	2600	<input type="checkbox"/>	<b>GW F1 315 MA840*</b>	



\* The products have guaranteed availability "PRONTO" while stocks last.

# ELIA EL



White / Textured  
 Black / Textured




Scan the QR-code for the latest information

## ELIA EL

IP65 - IK08 - 750 °C

LUMINAIRE WATTAGE (W)	CLASS	ENERG	CRF	KELVIN	OPTIC	WIRING	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	PART NUMBER	PRONTO
<b>Power LED 220-240 V 50/60 Hz</b>										
18	I	✓	80	4000	Opal	Stand alone	1650	<input checked="" type="checkbox"/>	<b>GW F2 200 LA840*</b>	
18	I	✓	80	4000	Opal	Stand alone	1650	<input type="checkbox"/>	<b>GW F2 210 LA840*</b>	



\* The products have guaranteed availability "PRONTO" while stocks last.

# STILO+




Scan the QR-code for the latest information

■ AN-96 / Anthracite gray / Textured

## STILO+MIDI H720

IP44 - IK04


LAMPHOLDER	LUMINAIRE WATTAGE [W]	CLASS	ENEC	CEI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PROFITO
E27	1x60	I	-	-	-	S/EW	-	-	-	■ 302275		



## STILO+MAXI H1290


IP44 - IK04

LAMPHOLDER	LUMINAIRE WATTAGE [W]	CLASS	ENEC	CEI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PROFITO
E27	1x75	I	-	-	-	S/EW	-	-	-	■ 302284		





# PADO




Scan the QR-code for the latest information

- AN-96 / Anthracite gray / Textured
- BK-81 / Black / Textured

## PADO 600

IP65 - IK05


LUMINAIRE WASTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRONTO
Power LED 220-240 V 50/60 Hz											
20	I	-	80	3000	S/EW	-	1974	1080	■	<b>304085</b>	



## PADO 900

IP65 - IK05


LUMINAIRE WASTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRONTO
Power LED 220-240 V 50/60 Hz											
20	I	-	80	3000	S/EW	-	1974	1080	■	<b>304089</b>	



## PADO

IP65 - IK05



LUMINAIRE WASTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRONTO
Power LED 220-240 V 50/60 Hz											
20	I	-	80	3000	S/EW	-	1974	1080	■	<b>304093</b>	



## PADO BASIC

IP65 - IK05

LUMINAIRE WASTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRONTO
Power LED 220-240 V 50/60 Hz											
9.5	I	-	80	3000	S/EW	-	1491	830	■	<b>306289</b>	

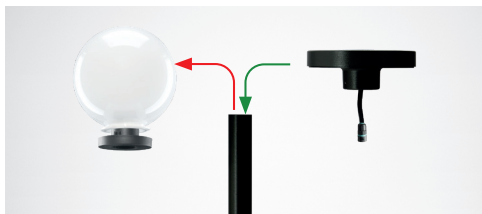

# QUASAR 10 CEILING




Scan the QR-code for the latest information

- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured

## QUASAR 10 CEILING

IP40 - IK06

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CEI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRINTO
<b>Power LED 230 V 50 Hz</b>											
6	I	-	80	3000	S/EW	-	500	221	■	<b>304489</b>	
6	I	-	80	3000	S/EW	-	500	221	□	<b>304491</b>	



# QUASAR 30 CEILING




Scan the QR-code for the latest information

- AN-96 / Anthracite gray / Textured

## QUASAR 30 CEILING TECH

IP65 - IK07

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CEI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRINTO
<b>Power LED 220-240 V 50/60 Hz</b>											
20	I	✓	80	4000	S/I	-	2384	1652	■	<b>306175</b>	
20	I	✓	80	3000	S/I	-	2276	1482	■	<b>306176</b>	



# QUASAR 10




Scan the QR-code for the latest information

- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- BK-81 / Black / Textured
- WH-87 / White / Textured

## QUASAR 10 1WB

IP44 - IK02

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CE	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR/FINISH	PART NUMBER	PRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
3.5	I	✓	80	3000	R	-	150	100	■	<b>303354</b>	
3.5	I	✓	80	4000	R	-	230	122	■	<b>303357</b>	
3.5	I	✓	80	3000	R	-	150	100	■	<b>303356</b>	
3.5	I	✓	80	3000	R	-	150	100	■	<b>30335690104</b>	
3.5	I	✓	80	3000	R	-	150	100	■	<b>303450</b>	



## QUASAR 10 2WB

IP44 - IK02

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CE	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR/FINISH	PART NUMBER	PRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
6	I	✓	80	3000	R	-	300	192	■	<b>303360</b>	
6	I	✓	80	4000	R	-	460	235	■	<b>303363</b>	
6	I	✓	80	3000	R	-	300	192	■	<b>303362</b>	
6	I	✓	80	3000	R	-	300	192	■	<b>30336290102</b>	
6	I	✓	80	3000	R	-	300	192	■	<b>303452</b>	



## QUASAR 10 1NB+1WB

IP44 - IK02

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CE	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR/FINISH	PART NUMBER	PRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
6	I	✓	80	4000	R	-	460	141	■	<b>303369</b>	
6	I	✓	80	3000	R	-	300	113	■	<b>303368</b>	



# QUASAR 20



Scan the QR-code for the latest information

- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- BK-81 / Black / Textured
- WH-87 / White / Textured


## QUASAR 20 M

IP65 - IK06

LUMINAIRE WATTAGE [W]	CLASS	EMEC	CR	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRODUCT
-----------------------	-------	------	----	--------	-------	------------	-------------------------------	-----------------------------	----------------	-------------	---------

### Power LED 220-240 V 50/60 Hz

11	I	✓	80	3000	S/EW	-	1292	492	GR-94	303542	
11	I	✓	80	4000	S/EW	-	1356	519	AN-96	303539	
11	I	✓	80	3000	S/EW	-	1292	492	BK-81	303540	
11	I	✓	80	4000	S/EW	-	1356	519	WH-87	303537	
11	I	✓	80	3000	S/EW	-	1292	492	WH-87	303538	



## QUASAR 20 TECH

IP65 - IK07

LUMINAIRE WATTAGE [W]	CLASS	EMEC	CR	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRODUCT
-----------------------	-------	------	----	--------	-------	------------	-------------------------------	-----------------------------	----------------	-------------	---------

### Power LED 220-240 V 50/60 Hz

11	I	✓	80	4000	A30/M	30°	1356	797	GR-94	303535	
11	I	✓	80	3000	A30/M	30°	1292	758	GR-94	303536	
11	I	✓	80	4000	A30/M	30°	1356	797	AN-96	303533	
11	I	✓	80	3000	A30/M	30°	1292	758	AN-96	303534	
11	I	✓	80	4000	A30/M	30°	1356	797	BK-81	303531	
11	I	✓	80	3000	A30/M	30°	1292	758	BK-81	303532	



## QUASAR 20 B

IP65 - IK06

LUMINAIRE WATTAGE [W]	CLASS	EMEC	CR	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRODUCT
-----------------------	-------	------	----	--------	-------	------------	-------------------------------	-----------------------------	----------------	-------------	---------

### Power LED 220-240 V 50/60 Hz

20	I	✓	80	4000	S/EW	-	2712	985	GR-94	303547	
20	I	✓	80	3000	S/EW	-	2584	930	GR-94	303548	
20	I	✓	80	4000	S/EW	-	2712	985	AN-96	303545	
20	I	✓	80	3000	S/EW	-	2584	930	AN-96	303546	
20	I	✓	80	4000	S/EW	-	2712	985	BK-81	303543	
20	I	✓	80	3000	S/EW	-	2584	930	BK-81	303544	



## QUASAR 20 DOUBLE TECH

IP65 - IK07

LUMINAIRE WATTAGE [W]	CLASS	EMEC	CR	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRODUCT
-----------------------	-------	------	----	--------	-------	------------	-------------------------------	-----------------------------	----------------	-------------	---------

### Power LED 220-240 V 50/60 Hz

20	I	✓	80	4000	A30/M	-	2712	1475	GR-94	304100	
20	I	✓	80	3000	A30/M	-	2584	1417	GR-94	304097	
20	I	✓	80	4000	A30/M	-	2712	1475	AN-96	304101	
20	I	✓	80	3000	A30/M	-	2584	1417	AN-96	304098	
20	I	✓	80	4000	A30/M	-	2712	1475	BK-81	30409890104	
20	I	✓	80	3000	A30/M	-	2584	1417	BK-81	304099	
20	I	✓	80	3000	A30/M	-	2584	1417	WH-87	304096	



# QUASAR 30




Scan the QR-code for the latest information

- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- BK-81 / Black / Textured
- WH-87 / White / Textured

## QUASAR 30 M

IP65 - IK06

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
20	I	✓	80	3000	S/EW	-	2584	936	■	<b>303558</b>	
20	I	✓	80	3000	S/EW	-	2584	936	□	<b>303556</b>	



## QUASAR 30 TECH

IP65 - IK07

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
20	I	✓	80	4000	A30/M	30°	2712	1606	■	<b>303553</b>	
20	I	✓	80	3000	A30/M	30°	2584	1557	■	<b>303554</b>	
20	I	✓	80	4000	A30/M	30°	2712	1606	■	<b>303551</b>	
20	I	✓	80	3000	A30/M	30°	2584	1557	■	<b>303552</b>	
20	I	✓	80	3000	A30/M	30°	2584	1557	■	<b>3035290105</b>	
20	I	✓	80	4000	A30/M	30°	2712	1606	□	<b>303549</b>	
20	I	✓	80	3000	A30/M	30°	2584	1557	□	<b>303550</b>	



## QUASAR 30 B

IP65 - IK06

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
32	I	✓	80	3000	S/EW	-	4572	1532	■	<b>303564</b>	
32	I	✓	80	3000	S/EW	-	4572	1532	□	<b>303562</b>	



## QUASAR 30 DOUBLE TECH

IP65 - IK07

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
32	I	✓	80	3000	A30/M	-	4572	2427	■	<b>304103</b>	
32	I	✓	80	4000	A30/M	-	4800	2489	■	<b>304107</b>	
32	I	✓	80	3000	A30/M	-	4572	2427	■	<b>304104</b>	
32	I	✓	80	4000	A30/M	-	4800	2489	□	<b>304105</b>	
32	I	✓	80	3000	A30/M	-	4572	2427	□	<b>304102</b>	



# ORION H




Scan the QR-code for the latest information

- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured

## ORION H M

IP65 - IK06

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR/FINISH	PART NUMBER	FRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
5	I	-	80	4000	A/EW	-	742	363	■	<b>3105448</b>	
5	I	-	80	3000	A/EW	-	675	352	■	<b>3105446</b>	
5	I	-	80	4000	A/EW	-	742	363	□	<b>3105449</b>	
5	I	-	80	3000	A/EW	-	675	352	□	<b>3105447</b>	



## ORION H B

IP65 - IK06

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR/FINISH	PART NUMBER	FRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
10	I	-	80	4000	A/EW	-	1485	845	■	<b>3105452</b>	
10	I	-	80	3000	A/EW	-	1350	792	■	<b>3105450</b>	
10	I	-	80	3000	A/EW	-	1350	792	□	<b>3105451</b>	



# ORION V




Scan the QR-code for the latest information

- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured

## ORION V M

IP65 - IK06

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR/FINISH	PART NUMBER	FRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
5	I	-	80	4000	S/EW	-	742	578	■	<b>3105440</b>	
5	I	-	80	3000	S/EW	-	675	539	■	<b>3105438</b>	
5	I	-	80	3000	S/EW	-	675	539	□	<b>3105439</b>	




## ORION V B

IP65 - IK06

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR/FINISH	PART NUMBER	FRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
10	I	-	80	4000	S/EW	-	1484	1125	■	<b>3105444</b>	
10	I	-	80	3000	S/EW	-	1350	1065	■	<b>3105442</b>	
10	I	-	80	3000	S/EW	-	1350	1065	□	<b>3105443</b>	



# SHIELD+ 1




Scan the QR-code for the latest information

■ AN-96 / Anthracite gray / Textured


## SHIELD+ 1 MULTIPOWER

IP66 - IK07

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR/ FINISH	PART NUMBER	PHOTO
<b>Power LED 220-240 V 50/60 Hz</b>											
13/19/27	I	-	80	4000	A/EW	-	3605	3072	■	<b>3106354</b>	
13/19/27	I	-	80	3000	A/EW	-	3515	2808	■	<b>3106352</b>	



# SHIELD+ 2




Scan the QR-code for the latest information

■ AN-96 / Anthracite gray / Textured

## SHIELD+ 2

IP66 - IK09

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR/ FINISH	PART NUMBER	PHOTO
<b>Power LED 220-240 V 50/60 Hz</b>											
79	I	-	80	4000	A/EW	-	10552	7985	■	<b>3106328</b>	
79	I	-	80	3000	A/EW	-	10284	7261	■	<b>3106326</b>	



# INSERT+ ZERO




Scan the QR-code for the latest information

- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured

## INSERT+ ZERO

IP65 - IK08

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	FRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
4.5	I	-	80	3000	A29/M	-	511	125	■	<b>304112</b>	
4.5	I	-	80	3000	A29/M	-	511	125	□	<b>304108</b>	



# INSERT+ ZERO CLIP




Scan the QR-code for the latest information

- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured

## INSERT+ ZERO CLIP


IP65 - IK08

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	FRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
4.5	I	-	80	3000	A/M	-	511	142	■	<b>3100066</b>	
4.5	I	-	80	3000	A/M	-	511	142	□	<b>3100062</b>	





# INSERT+ ZERO GLASS




Scan the QR-code for the latest information

WH-87 / White / Textured

## INSERT+ ZERO GLASS

IP65 - IK05

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR/ FINISH	PART NUMBER	PROFITO
Power LED 220-240 V 50/60 Hz											
4.5	I	-	80	3000	S/EW	-	511	78	<input type="checkbox"/>	<b>3114950</b>	



# INSERT+ 1/2




Scan the QR-code for the latest information

- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured

## INSERT+ 1

IP65 - IK07


LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PROFITO
<b>Power LED 220-240 V 50/60 Hz</b>											
6	I	-	80	3000	A37/M	-	825	250	<input type="checkbox"/>	<b>304116</b>	
6	I	-	80	3000	A37/M	-	825	250	<input type="checkbox"/>	<b>304118</b>	
6	I	-	80	3000	A37/M	-	825	250	<input type="checkbox"/>	<b>304114</b>	




## INSERT+ 2



IP65 - IK07 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PROFITO
<b>Power LED 220-240 V 50/60 Hz</b>											
10	I	-	80	3000	A25/W	-	1350	503	<input type="checkbox"/>	<b>304122</b>	
10	I	-	80	3000	A25/W	-	1350	503	<input type="checkbox"/>	<b>304124</b>	
10	I	-	80	3000	A25/W	-	1350	503	<input type="checkbox"/>	<b>304120</b>	



## Mandatory accessories


DESCRIPTION	COLOR	PART NUMBER	PRONTO
<b>INSERT+ 1</b>			
Recessed box INSERT+ 1		<b>310475</b>	
<b>INSERT+ 2</b>			
Recessed box Insert + 2		<b>310490</b>	




### Complete unit

1A+1B = please order 2 codes

COMPONENTS
<b>A</b> luminaire
<b>B</b> recessed fixing kit








**310475**




**310490**

## Optional accessories

DESCRIPTION	COLOR	PART NUMBER	PRONTO
<b>INSERT+ 1</b>			
Adaptor INSERT+ 1 (retrofit kit Insert 1)		<b>310478</b>	
<b>INSERT+ 2</b>			
Adaptor NSERT+ 2 (retrofit kit Insert 2)		<b>310489</b>	



INSERT 1



INSERT 2




### Complete unit

1A+1C = please order 2 codes

COMPONENTS
<b>A</b> luminaire
<b>C</b> adaptor




INSERT+ 1



**310478**



INSERT+ 2



**310489**

# MIMIK 10 POST




Scan the QR-code for the latest information

- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite grey / Textured

## MIMIK 10 POST 300

IP65 - IK08


LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRINTO
<b>Power LED 220-240 V 50/60 Hz</b>											
10	I	✓	80	3000	A/I	-	1006	745	■	<b>304618</b>	



## MIMIK 10 POST 600

IP65 - IK08


LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRINTO
<b>Power LED 220-240 V 50/60 Hz</b>											
10	I	✓	80	4000	A/I	-	1075	915	■	<b>304616</b>	
10	I	✓	80	3000	A/I	-	1006	745	■	<b>304614</b>	



## MIMIK 10 POST 1000

IP65 - IK08

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRINTO
<b>Power LED 220-240 V 50/60 Hz</b>											
10	I	✓	70	4000	CP/T3	-	1076	762	■	<b>306553</b>	
10	I	✓	70	3000	CP/T3	-	1000	719	■	<b>306552</b>	



## MIMIK 10 POST 1000 HU


IP65 - IK08

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRINTO
<b>Power LED 220-240 V 50/60 Hz</b>											
10	I	✓	70	4000	CP/T3	-	1076	762	■	<b>3112998</b>	
10	I	✓	70	3000	CP/T3	-	1000	719	■	<b>3112997</b>	


## Mandatory accessories

DESCRIPTION	COLOR	PART NUMBER	PRINTO
<b>MIMIK 10 POST 1000</b>			
Plate HU MIMIK10 POST	■	<b>3112992</b>	
Plate FR MIMIK10 POST	■	<b>3112994</b>	

Identifying and classifying our optics



# TYK+ 10



■ AN-96 / Anthracite gray / Textured




Scan the QR-code for the latest information

## TYK+ 10 C/I

IP66 - IK06

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	FRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
7	I	-	80	4000	C/I	10°	700	560	■	<b>3107283</b>	
7	I	-	80	3000	C/I	10°	650	519	■	<b>3107284</b>	



## TYK+ 10 C/M

IP66 - IK06

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	FRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
7	I	-	80	4000	C/M	34°	700	598	■	<b>3107286</b>	
7	I	-	80	3000	C/M	34°	650	554	■	<b>3107287</b>	



## Optional accessories

DESCRIPTION	COLOR	PART NUMBER	FRONTO
TYK+ 10 Ground spike	■	<b>700191</b>	




700191

Identifying and classifying our optics



# FOCUS+ ZERO




Scan the QR-code for the latest information

■ AN-96 / Anthracite gray / Textured

## FOCUS+ ZERO S/EW

IP65 - IK06


LUMINAIRE WATTAGE [W]	CLASS	EMEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	FRONTO
Power LED 220-240 V 50/60 Hz											
9.5	I	-	80	3000	S/EW	-	1350	1107	■	<b>304610</b>	



## FOCUS+ ZERO KIT S/EW

IP65 - IK06

LUMINAIRE WATTAGE [W]	CLASS	EMEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	FRONTO
Power LED 220-240 V 50/60 Hz											
9.5	I	-	80	3000	S/EW	-	1350	1009	■	<b>305508</b>	



# CRICKET+ 10



■ AN-96 / Anthracite gray / Textured




Scan the QR-code for the latest information

## CRICKET+ 10 C/I

IP67 - IK08 - 650 °C

LUMINAIRE WATERGATE (W)	CLASS	ENEC	CR	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	PART NUMBER	PRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
5	I	-	80	4000	C/I	-	475	446	■	<b>3109824</b>	
5	I	-	80	3000	C/I	-	440	415	■	<b>3109825</b>	



## CRICKET+ 10 C/M


IP67 - IK08 - 650 °C

LUMINAIRE WATERGATE (W)	CLASS	ENEC	CR	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	PART NUMBER	PRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
5	I	-	80	4000	C/M	-	475	436	■	<b>3109822</b>	
5	I	-	80	3000	C/M	-	440	406	■	<b>3109823</b>	


## Mandatory accessories

DESCRIPTION	COLOR	PART NUMBER	PRONTO
CRICKET+ 10 Recessed box CRICKET+ 10 MARINE		<b>3109879</b>	

## Identifying and classifying our optics



# WIN PRO 20



■ GR-94 / Metallic grey / Textured




Scan the QR-code for the latest information

## WIN PRO 20 A/M

IP66 - IK08 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CR	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PROFITO
<b>Power LED 220-240 V 50/60 Hz</b>											
68	I	-	70	4000	A55/M	-	13088	9701	■	<b>3114499</b>	
68	I	-	70	3000	A55/M	-	12856	9330	■	<b>3114498</b>	




## WIN PRO 20 A/W

IP66 - IK08 - 960 °C


LUMINAIRE WATTAGE [W]	CLASS	ENEC	CR	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PROFITO
<b>Power LED 220-240 V 50/60 Hz</b>											
68	I	-	70	4000	A35/W	-	13088	9356	■	<b>3114505</b>	
68	I	-	70	3000	A35/W	-	12856	8997	■	<b>3114504</b>	

Identifying and classifying our optics





# WIN PRO 30



■ GR-94 / Metallic grey / Textured



Scan the QR-code for the latest information

## WIN PRO 30 A/M


IP66 - IK08 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	FRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
252	I	-	70	4000	A55/M	-	42232	37262	■	<b>3114589</b>	
195	I	-	70	4000	A55/M	-	35586	29468	■	<b>3114553</b>	


## WIN PRO 30 A/W

IP66 - IK08 - 960 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	FRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
252	I	-	70	4000	A35/W	-	42232	36010	■	<b>3114601</b>	
195	I	-	70	4000	A35/W	-	35586	28685	■	<b>3114565</b>	



Identifying and classifying our optics



# GUELL ZERO




Scan the QR-code for the latest information

- GR-94 / Metallic grey / Textured
- BK-RAL9005 / Black RAL9005 / Glossy

## GUELL ZERO S/M

IP66 - IK06 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	FRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
28	I	-	80	4000	S/M	-	3461	3162	■	<b>306514</b>	
15	I	-	80	4000	S/M	-	1888	1603	■	<b>06115394</b>	



## GUELL ZERO A/W


IP66 - IK06 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	FRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
28	I	-	80	4000	A30/W	-	3461	3167	■	<b>306523</b>	
15	I	-	80	4000	A30/W	-	1888	1589	■	<b>06115794</b>	


## GUELL ZERO KIT S/M

IP66 - IK06 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	FRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
28	I	-	80	4000	S/M	-	3461	3162	■	<b>306541</b>	
28	I	-	80	3000	S/M	-	3296	3014	■	<b>306539</b>	
15	I	-	80	4000	S/M	-	1888	1603	■	<b>06124980</b>	



Identifying and classifying our optics



# GUELL 1




Scan the QR-code for the latest information

■ GR-94 / Metallic grey / Textured

## GUELL 1 S/W

IP66 - IK07 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	FRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
51	I	-	80	4000	S/W	-	8099	6860	■	<b>3115049</b>	
36	I	-	80	4000	S/W	-	6074	5391	■	<b>3115054</b>	




## GUELL 1 A/W

IP66 - IK07 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	FRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
51	I	-	80	4000	A40/W	-	8099	6505	■	<b>3115059</b>	
51	I	-	80	3000	A40/W	-	7660	6249	■	<b>3115060</b>	
36	I	-	80	4000	A40/W	-	6074	5112	■	<b>3115064</b>	
36	I	-	80	3000	A40/W	-	5748	5028	■	<b>3115065</b>	

Identifying and classifying our optics



# GUELL 2



■ GR-94 / Metallic grey / Textured




Scan the QR-code for the latest information

## GUELL 2 S/W

IP66 - IK07 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PHOTO
<b>Power LED 220-240 V 50/60 Hz</b>											
149	I	-	80	4000	S/W	-	25350	20335	■	<b>3112391</b>	
103	I	-	80	4000	S/W	-	16198	13233	■	<b>3115110</b>	
74	I	-	80	4000	S/W	-	12148	10463	■	<b>3115115</b>	




## GUELL 2 A/W

IP66 - IK07 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PHOTO
<b>Power LED 220-240 V 50/60 Hz</b>											
149	I	-	80	4000	A40/W	-	25350	20323	■	<b>3112390</b>	
149	I	-	80	3000	A40/W	-	24089	19312	■	<b>3112387</b>	
103	I	-	80	4000	A40/W	-	16198	13006	■	<b>3115119</b>	
103	I	-	80	3000	A40/W	-	15320	12619	■	<b>3115120</b>	
74	I	-	80	4000	A40/W	-	12148	10030	■	<b>3115125</b>	
74	I	-	80	3000	A40/W	-	11196	9605	■	<b>3115126</b>	

Identifying and classifying our optics



# GUELL 2.5



■ GR-94 / Metallic grey / Textured




Scan the QR-code for the latest information

## GUELL 2.5 S/W

IP66 - IK07 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
193	I	-	80	4000	S/W	-	30560	25323	■	<b>3112403</b>	
193	I	-	80	3000	S/W	-	28906	24063	■	<b>3112400</b>	
154	I	-	80	4000	S/W	-	24200	20345	■	<b>3115147</b>	
154	I	-	80	3000	S/W	-	22900	18843	■	<b>3115148</b>	
<b>Power LED dimmable 1-10 V 220-240 V 50/60 Hz</b>											
227	I	-	80	4000	S/W	-	36440	31072	■	<b>3117393</b>	
227	I	-	80	3000	S/W	-	34480	29882	■	<b>3117391</b>	
155	I	-	80	4000	S/W	-	24300	21783	■	<b>3117399</b>	
155	I	-	80	3000	S/W	-	22900	20440	■	<b>3117397</b>	




## GUELL 2.5 A/W

IP66 - IK07 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
193	I	-	80	4000	A40/W	36°	30560	24501	■	<b>3112402</b>	
193	I	-	80	3000	A40/W	36°	28906	23282	■	<b>3112399</b>	
154	I	-	80	4000	A40/W	36°	24200	20027	■	<b>3115156</b>	
154	I	-	80	3000	A40/W	36°	22900	18148	■	<b>3115157</b>	
<b>Power LED dimmable 1-10 V 220-240 V 50/60 Hz</b>											
227	I	-	80	4000	A40/W	-	36440	30536	■	<b>3117381</b>	
227	I	-	80	3000	A40/W	-	34480	29368	■	<b>3117379</b>	
155	I	-	80	4000	A40/W	-	24300	21123	■	<b>3117387</b>	

## Optional accessories

DESCRIPTION	COLOR	PART NUMBER	PRONTO
<b>GUELL 2.5</b>			
Single pole top support GUELL 2.5	■	<b>310966</b>	
Double pole top support GUELL 2.5	■	<b>310967</b>	




310966



310967

Identifying and classifying our optics



# SMART [PRO]e - 1M




Scan the QR-code for the latest information

■ Graphite grey / Textured


## SMART [PRO]e - 1 MODULE - EQUIVALENT 250W MT

IP66 - IK08 - 850 °C

LUMINAIRE VATTAGE [W]	CLASS	EMEC	CRI	KELVIN	OPTIC	WIRING	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRONTO
Power LED dimmable 1-10 V 220-240 V 50/60 Hz										
150	I	✓	70	4000	ASW	Stand alone	22800	■	<b>GW P2 134 CR740</b>	
150	I	✓	70	4000	SW	Stand alone	22500	■	<b>GW P2 134 CK740</b>	



Identifying and classifying our optics



# SMART [PRO]e - 2M




Scan the QR-code for the latest information

■ Graphite grey / Textured


## SMART [PRO]e - 2 MODULES - EQUIVALENT 400W MT

IP66 - IK08 - 850 °C


LUMINAIRE VATTAGE [W]	CLASS	EMEC	CRI	KELVIN	OPTIC	WIRING	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRONTO
Power LED dimmable 1-10 V 220-240 V 50/60 Hz										
300	I	✓	70	4000	ASW	Stand alone	45600	■	<b>GW P2 234 CR740</b>	
300	I	✓	70	4000	SW	Stand alone	45000	■	<b>GW P2 234 CK740</b>	



Identifying and classifying our optics



# SPIDER+ 10



Scan the QR-code for the latest information

■ BK-81 / Black / Textured

## SPIDER+ 10 S/EW


IP66 - IK06

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRINTO
9.5	I	-	80	3000	S/EW	-	1350	977	■	<b>3108608</b>	


## SPIDER+ 10 KIT S/EW

IP66 - IK06

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRINTO
9.5	I	-	80	3000	S/EW	-	1350	977	■	<b>3108612</b>	

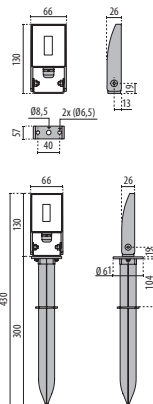

# SPIDER+ 20




Scan the QR-code for the latest information

■ BK-81 / Black / Textured

## SPIDER+ 20 S/W MULTIPOWER

IP67 - IK05 - 960 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CR	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRODUCT
<b>Power LED 220-240 V 50/60 Hz</b>											
37/51	I	-	80	4000	S/W	-	6965	6179	■	<b>3106050</b>	
37/51	I	-	80	3000	S/W	-	6675	5921	■	<b>3106051</b>	




## SPIDER+ 20 A/EW MULTIPOWER

IP67 - IK05 - 960 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CR	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRODUCT
<b>Power LED 220-240 V 50/60 Hz</b>											
37/51	I	-	80	4000	A35/EW	-	6965	6005	■	<b>3106052</b>	
37/51	I	-	80	3000	A35/EW	-	6675	5754	■	<b>3106053</b>	

## Optional accessories


DESCRIPTION	COLOR	PART NUMBER	PRODUCT
<b>SPIDER+ 20</b>			
500 mm wall mounting extension arm in sheet steel painted	■	<b>3107120</b>	
1000 mm wall mounting extension arm in sheet steel painted	■	<b>3107121</b>	



3107120


3107121

## Identifying and classifying our optics





# SPIDER+ 30




Scan the QR-code for the latest information

■ BK-81 / Black / Textured

## SPIDER+ 30 S/W MULTIPOWER

IP67 - IK06 - 960 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PHOTO
<b>Power LED 220-240 V 50/60 Hz</b>											
74/101	I	-	80	4000	S/W	-	13930	11987	■	<b>3106054</b>	
74/101	I	-	80	3000	S/W	-	13350	11486	■	<b>3106055</b>	




## SPIDER+ 30 A/EW MULTIPOWER

IP67 - IK06 - 960 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PHOTO
<b>Power LED 220-240 V 50/60 Hz</b>											
74/101	I	-	80	4000	A35/EW	-	13930	11649	■	<b>3106056</b>	
74/101	I	-	80	3000	A35/EW	-	13350	11162	■	<b>3106057</b>	

## Optional accessories

DESCRIPTION	COLOR	PART NUMBER	PHOTO
<b>SPIDER+ 30</b>			
500 mm wall mounting extension arm in sheet steel painted	■	<b>3107120</b>	
1000 mm wall mounting extension arm in sheet steel painted	■	<b>3107121</b>	




3107120



3107121

## Identifying and classifying our optics



# ELIA FL




Scan the QR-code for the latest information

■ Black / Textured

## ELIA FL - S3


IP66 - IK08 - 750 °C

LUMINAIRE WATERPAGE [W]	CLASS	ENEC	CR	KELVIN	OPTIC	WIRING	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FROST	PART NUMBER	PRONTO
<b>Power LED 220-240 V 50/60 Hz</b>										
50	I	✓	80	4000	60°	Stand alone	6800	■	<b>GW F1 100 HH840*</b>	
50	I	✓	80	4000	A	Stand alone	6400	■	<b>GW F1 100 HC840</b>	



\* The products have guaranteed availability "PRONTO" while stocks last.

Identifying and classifying our optics



# ELIA FL




Scan the QR-code for the latest information

■ Black / Textured

## ELIA FL - M3


IP66 - IK08 - 750 °C

LUMINAIRE WATERPAGE [W]	CLASS	ENEC	CR	KELVIN	OPTIC	WIRING	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FROST	PART NUMBER	PRONTO
<b>Power LED 220-240 V 50/60 Hz</b>										
100	I	✓	80	4000	60°	Stand alone	13800	■	<b>GW F1 100 NH840</b>	
100	I	✓	80	4000	A	Stand alone	13400	■	<b>GW F1 100 NC840*</b>	



\* The products have guaranteed availability "PRONTO" while stocks last.

Identifying and classifying our optics



# ELIA FL



Scan the QR-code for the latest information

■ Black / Textured

## ELIA FL - L3


IP66 - IK08 - 750 °C

LUMINAIRE WATTAGE [W]	CLASS	EDEC	CRI	KEELVM	OPTIC	WIRING	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRONTO
<b>Power LED 220-240 V 50/60 Hz</b>										
150	I	✓	80	4000	60°	Stand alone	21200	■	<b>GW F1 100 RH840*</b>	
150	I	✓	80	4000	A	Stand alone	20600	■	<b>GW F1 100 RC840</b>	



\* The products have guaranteed availability "PRONTO" while stocks last.

Identifying and classifying our optics



# ELIA FL



Scan the QR-code for the latest information

■ Black / Textured

## ELIA FL - XL3


IP66 - IK08 - 750 °C

LUMINAIRE WATTAGE [W]	CLASS	EDEC	CRI	KEELVM	OPTIC	WIRING	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRONTO
<b>Power LED 220-240 V 50/60 Hz</b>										
200	I	✓	80	4000	60°	Stand alone	27900	■	<b>GW F1 100 ZH840*</b>	
200	I	✓	80	4000	A	Stand alone	27600	■	<b>GW F1 100 ZC840</b>	



\* The products have guaranteed availability "PRONTO" while stocks last.

Identifying and classifying our optics



# HEDO+




Scan the QR-code for the latest information

■ AN-96 / Anthracite gray / Textured


## HEDO+ C/EW

IP65 - IK09


LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR/ FINISH	PART NUMBER	PHOTO
<b>Power LED 220-240 V 50/60 Hz</b>											
42	I	-	80	3000	C/EW	-	5894	3710	■	<b>3104689</b>	
23	I	-	80	3000	C/EW	-	3150	2080	■	<b>3104683</b>	



Identifying and classifying our optics



# SPIDER+ POST




Scan the QR-code for the latest information

■ BK-81 / Black / Textured

## SPIDER+ POST A/EW MULTIPOWER

IP66 - IK06


LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
37/51	II	-	80	4000	A35/EW	-	6967	6005	■	<b>3109057</b>	
37/51	II	-	80	3000	A35/EW	-	6677	5754	■	<b>3109056</b>	



## SPIDER+ POST A/EW DLS+DETEK

IP65 - IK06

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	PRONTO
<b>Power LED 220-240 V 50/60 Hz</b>											
40	II	-	80	4000	A35/EW	-	5525	4763	■	<b>3115352</b>	
40	II	-	80	3000	A35/EW	-	5291	4560	■	<b>3115351</b>	



## Optional accessories

DESCRIPTION	COLOR	PART NUMBER	PRONTO
<b>SPIDER+ POST</b> Wall angled bracket in hot dipped galvanized steel, cataphoresis and finished polyester - Ø 60 mm	■	<b>1407779690100</b>	



1407779690100

# LYRA+



■ AN-96 / Anthracite gray / Textured




Scan the QR-code for the latest information

## LYRA+ SR/100


IP66 - IK06

LUMINAIRE WEIGHT [kg]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR/ FINISH	PART NUMBER	PHOTO
<b>Power LED - with automatic power reduction 220-240 V 50/60 Hz</b>											
54	II	-	70	4000	SR/100	100°	8680	7669	■	<b>3115299*</b>	
54	II	-	70	3000	SR/100	100°	7200	6970	■	<b>3115298*</b>	
30	II	-	70	4000	SR/100	100°	4480	3939	■	<b>3115297*</b>	
30	II	-	70	3000	SR/100	100°	3560	3580	■	<b>3115296*</b>	



\* The products will be available from September 2023.

Identifying and classifying our optics







PERFORMANCE  
**IN** LIGHTING

powered by  
**GEWISS**

#### **GEWISS S.p.A.**

Registered Office: Via A. Volta, 1,  
24069 CENATE SOTTO BG - Italy  
T. +39 035 946 111 - F. +39 035 945 222  
gewiss@gewiss.com - www.gewiss.com

#### **GEWISS UK LTD**

Unity House, Compass Point Business Park,  
9 Stocks Bridge Way, St. Ives  
Cambridgeshire, PE27 5JL  
United Kingdom  
T. +44 1954 712757  
gewiss-uk@gewiss.com

#### **GEWISS Romania SRL**

Sos. Pipera, Nr. 46D-46E-48, Oregon Park,  
Cladirea B, Etajul 4, Unitatea B.4.3.2.,  
Sector 2, Bucuresti  
T. +40 31 4370 650  
gewiss-ro@gewiss.com

#### **GEWISS Hungária KFT**

1107 Budapest - Ceglédi út 2  
T. +36 1 951 1496  
gewiss-hu@gewiss.com

#### **GEWISS Gulf FZE**

Building 6W Entrance A, 3rd Floor, Office 301  
Dubai Airport Free Zone (DAFZA)  
P.O. Box 54818 - Dubai  
T. +971 (4) 293 6000  
gewiss-ae@gewiss.com

#### **GEWISS Egypt for electrical and lighting solutions**

Star Capital Tower 2, Ninth Floor, Office 97,  
Citystars. 2 Ali Rashed St., Heliopolis,  
CAIRO – Egypt  
T. +2 02 24800774  
gewiss-eg@gewiss.com

#### **GEWISS Elektrik Tesisat Malzemeleri Ticaret**

Ltd. Şirketi  
Nida Kule İş Merkezi Değirmen Sok. No.18  
Kat:12 - 34742 Kozyatağı - Istanbul  
T. +90 (0) 216 569 71 00  
gewiss-tr@gewiss.com

Visit [www.gewiss.com](http://www.gewiss.com) and follow us on:

